

# DC680G

## Rack and pinion gate closer with guide rail





### ASSA ABLOY DC680G

- Suitable for non-paneled garden and pedestrian gates
- Adjustable size
- For single action gates leaf from 600 mm up to 1400 mm
- 

### Characteristics of DC680G

- Gate closer manufactured from heavy duty cast iron
- Adjustable size suitable for gate widths from 600 mm to 1400 mm
- Independent closing and latch speeds controlled by thermostatic valves ensuring stable closing times at different temperatures
- Pinch free guide rail for added safety
- Soft opening and strong closing
- Suitable for gates with or without protruding bars
- Easy to install no welding required
- Supplied complete with fixing plates, guide rail and mounting screws
- Corrosion resistant finishes: black similar to RAL 9004, silver and white similar RAL 9016

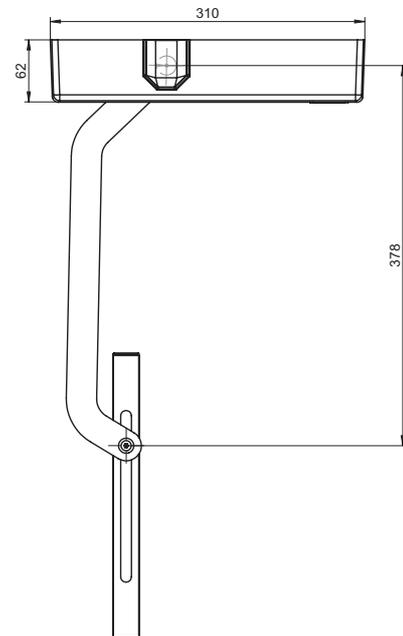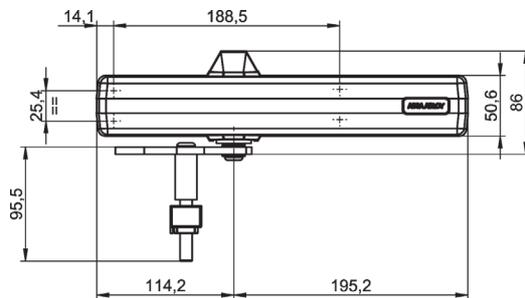

### Technical attributes

Adjustable to suit gate widths	600 mm to 1400 mm
Adjustable pretension	Yes
Gate swing direction	Left/right handed
Closing speed	Variable between 180°-20°
Latching speed	Variable between 20°-0°
Weight	7.8 kg
Height	75 mm
Depth	62 mm
Length	310 mm

# DC680G

## Technical attributes, dimensional drawings and order placement information

Our service for you: here you can see the individual advantages of our door closer models for your respective field of business.

### The advantages at a glance

Customer segment	Advantages
Project planners	- Favorably priced, reliable gate closer
Builders	- Quick and easy installation, no welding required - Suitable for left and right handed gates - Easy to adjust
Trade	- Supplied complete with fixing plates, guide rail and mounting screws
User	- Thermodynamic valves for consistent reliable closing in all temperatures - Pinch free guide rail for added safety - Soft opening and strong closing

### Specifications for DC680G

ASSA ABLOY DC680G adjustable size rack and pinion gate closer with guide rail for non-paneled garden and pedestrian gates






- Adjustable closing force, for gates from 600 mm to 1400 mm wide
- Independent closing speed and latch speed
- Suitable for garden and pedestrian gates
- Suitable for left and right handed gates

No accessories available

Colour:

- Silver EV1
- White, similar to RAL 9016
- Black, similar to RAL 9004

You can find the complete specification on the internet at: [www.assaabloy.de](http://www.assaabloy.de)

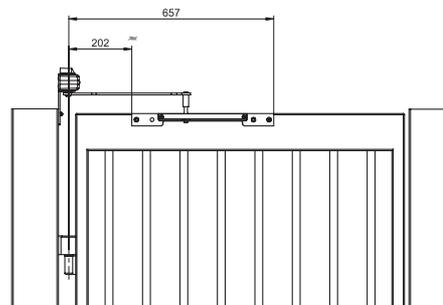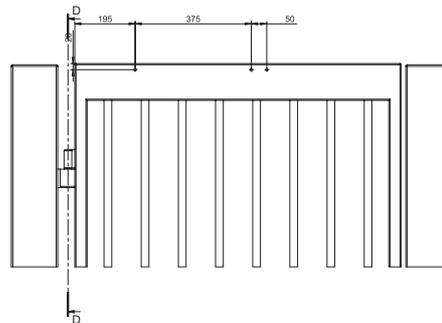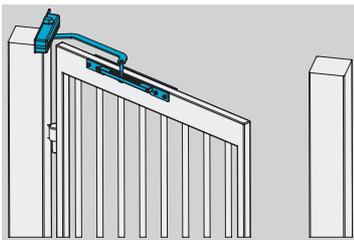

### Required space on gates

Left handed shown in diagram  
Right handed is the reverse

Designation / Item	Order no.
DC680G silver EV1	DC680G-----EV1-
DC680G white, similar RAL 9016	DC680G-----9016
DC680G black, similar RAL 9004	DC680G-----9004

# DC650G

## Rack and pinion gate closer with guide rail





### ASSA ABLOY DC650G

- Suitable for non-paneled garden and pedestrian gates
- Fixed size
- For single action gates leaf up to 1250 mm

### Characteristics of DC650G

- Gate closer manufactured from heavy duty cast iron
- Fixed size suitable for gate widths up to 1250 mm
- Independent closing and latch speeds controlled by thermostatic valves ensuring stable closing times at different temperatures
- Pinch free guide rail for added safety
- Soft opening and strong closing
- Suitable for gates with or without protruding bars
- Easy to install no welding required
- Supplied complete with fixing plates, guide rail and mounting screws
- Corrosion resistant finishes: black similar to RAL 9004, silver and white similar RAL 9016

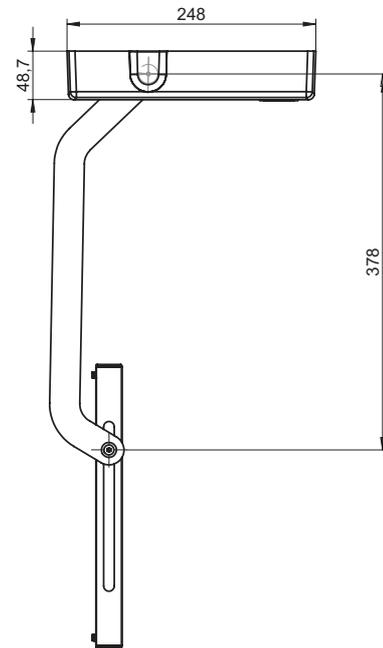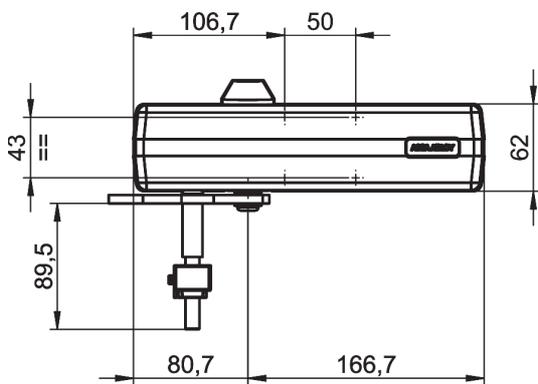

### Technical attributes

Gate width up to	1250 mm
Adjustable pretension	Yes
Gate swing direction	Left/right handed
Closing speed	Variable between 180°-20°
Latching speed	Variable between 20°-0°
Weight	7 kg
Height	62 mm
Depth	79 mm
Length	248 mm

# DC650G

## Technical attributes, dimensional drawings and order placement information

Our service for you: here you can see the individual advantages of our door closer models for your respective field of business.

### The advantages at a glance

Customer segment	Advantages
Project planners	- Favorably priced, reliable gate closer
Builders	- Quick and easy installation, no welding required - Suitable for left and right handed gates - Easy to adjust
Trade	- Supplied complete with fixing plates, guide rail and mounting screws
User	- Thermodynamic valves for consistent reliable closing in all temperatures - Pinch free guide rail for added safety - Soft opening and strong closing

You can find the complete specification on the internet at: [www.assaabloy.de](http://www.assaabloy.de)

### Specifications for DC650G






ASSA ABLOY DC650G fixed size strength rack and pinion gate closer with guide rail for non-paneled garden and pedestrian gates

- Suitable for gates up to 1250 mm wide
- Independent closing speed and latch speed
- Suitable for garden and pedestrian gates
- Suitable for left and right handed gates

No accessories available

Colour:

- Silver EV1
- White, similar to RAL 9016
- Black, similar to RAL 9004

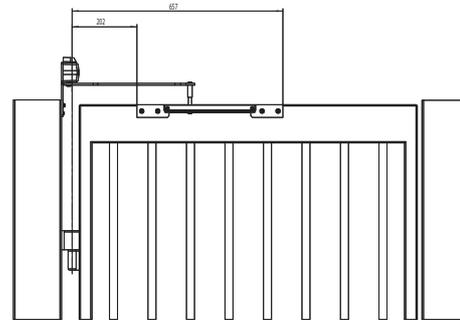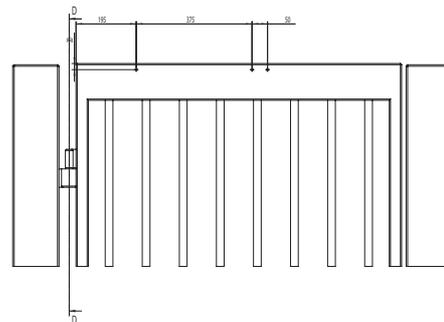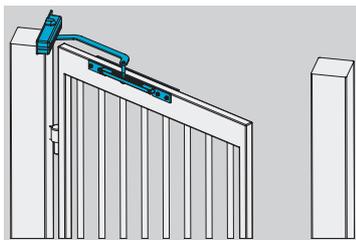

### Required space on gates

Left handed shown in diagram  
Right handed is the reverse

Designation / Item	Order no.
DC650G silver EV1	DC650G-----EV1-
DC650G white, similar RAL 9016	DC650G-----9016
DC650G black, similar RAL 9004	DC650G-----9004

## DC620G

### Rack and pinion gate closer with guide rail





#### ASSA ABLOY DC620G

- Suitable for non-paneled garden and pedestrian gates
- Fixed size
- For single action gates leaf up to 1000 mm

#### Characteristics of DC620G

- Gate closer manufactured from heavy duty cast iron
- Fixed size suitable for gate widths up to 1000 mm
- Independent closing and latch speeds controlled by thermostatic valves ensuring stable closing times at different temperatures
- Pinch free guide rail for added safety
- Soft opening and strong closing
- Suitable for gates with or without protruding bars
- Easy to install no welding required
- Supplied complete with fixing plates, guide rail and mounting screws
- Corrosion resistant finishes: black similar to RAL 9004, silver and white similar RAL 9016

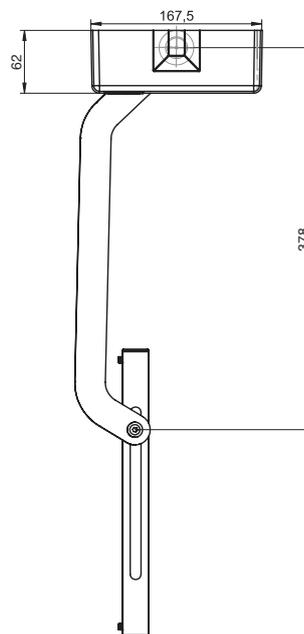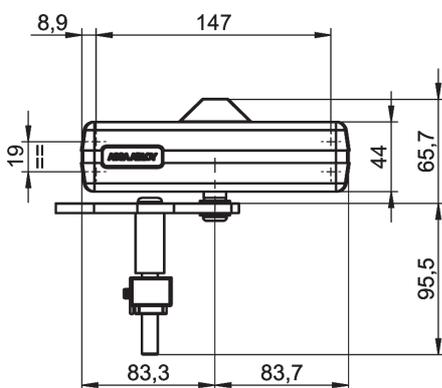

#### Technical attributes

Gate width up to	1000 mm
Adjustable pretension	Yes
Gate swing direction	Left/right handed
Closing speed	Variable between 180°-20°
Latching speed	Variable between 20°-0°
Weight	5.7 kg
Height	68.5 mm
Depth	62 mm
Length	167.5 mm

# DC620G

## Technical attributes, dimensional drawings and order placement information

Our service for you: here you can see the individual advantages of our door closer models for your respective field of business.

### The advantages at a glance

Customer segment	Advantages
Project planners	- Favorably priced, reliable gate closer
Builders	- Quick and easy installation, no welding required - Suitable for left or right handed gates - Easy to adjust
Trade	- Supplied complete with fixing plates, guide rail and mounting screws
User	- Thermodynamic valves for consistent reliable closing in all temperatures - Pinch free guide rail for added safety - Soft opening and strong closing

You can find the complete specification on the internet at: [www.assaabloy.de](http://www.assaabloy.de)

### Specifications for DC620G






ASSA ABLOY DC620G fixed size strength rack and pinion gate closer with guide rail for non-paneled garden and pedestrian gates

- Suitable for gates up to 1000 mm wide
- Independent closing speed and latch speed
- Suitable for garden and pedestrian gates
- Suitable for left and right handed gates

No accessories available

Colour:

- Silver EV1
- White, similar to RAL 9016
- Black, similar to RAL 9004

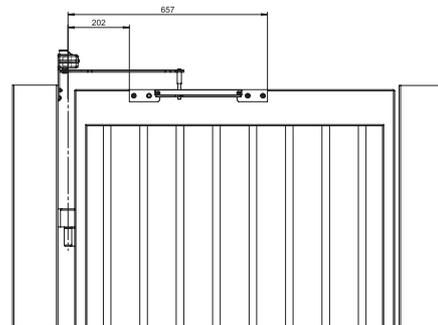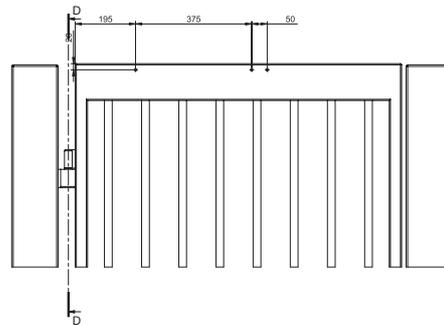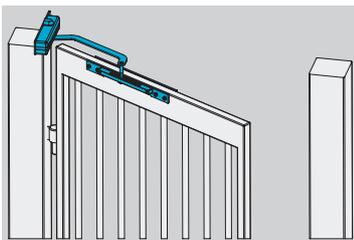

### Required space on gates

Left handed shown in diagram  
Right handed is the reverse

Designation / Item	Order no.
DC620G silver EV1	DC620G-----EV1-
DC620G white, similar RAL 9016	DC620G-----9016
DC620G black, similar RAL 9004	DC620G-----9004