


AVC305

B/W CCD Camera



Dimension

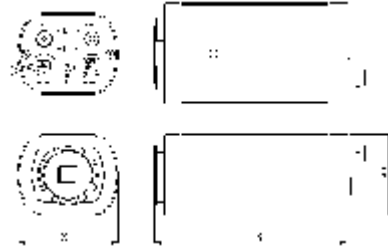

FEATURES

- | B/W CCD image sensor.
- | 0.05 Lux / F1.2.
- | 380 TV lines.
- | Signal-to-Noise ratio is more than 48dB
- | V.D./D.D. Selectable.
- | Acceptance of C/CS lens mount.
- | Standard packing does not include lens.

Rear Panel



AC24V



AC100V / AC230V

SPECIFICATION

Mode	AVC305E/AC24V	AVC305E/AC100/ 230V	AVC305C/AC24V	AVC305C/AC100/230 V
Pick up Element	B/W CCD image sensor			
Number of Pixel	510 (H) x 492(V) <EIA>		500(H) x 582(V) <CCIR>	
Resolution	380 TV lines			
Min. Illumination	0.05 Lux / F1.2			
S/N ratio	More than 48dB (AGC off)			
Electronic Shutter	1/60 (1/50) to 1/100,000 sec.			
Iris Mode	V.D. / D.D. selectable			
Lens Mount	C/CS mount changeable			
Load Impedance	75 Ω			
Microphone	Yes			
Power Source	AC24V± 10%	AC100V± 10%	AC24V± 10%	AC230V± 10%
Fuse	0.2A	0.2A	0.2A	0.2A
Power Consumption	3 W			
Dimension (mm)	118(L) x 62(W) x 50(H)			
Gross Weight	0.55kg	0.71kg	0.55kg	0.76

| Designs and specifications are subject to change without notice.