


NOTICE New RX-Multi 300-868MHz

1. Specifications RX-Multi

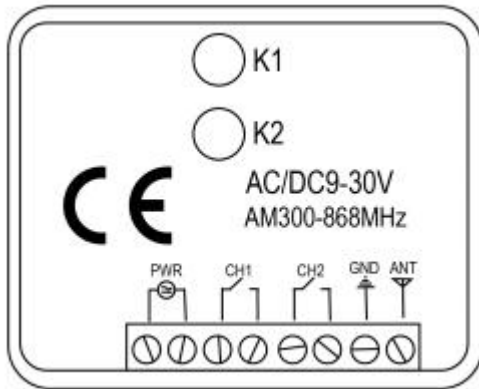

2. Brand selection

Using the 8-bit DIP switch, users can select different brands of remote control channels, and the brand selection is shown in Table 1.

3. Learning remote

The multi-frequency controller has two independent output channels, each channel has independent learning buttons K1, K2.

4. Power input

The power input range of the multi frequency controller is AC/DC 9~30V

5. How to let the remotes learn or clear all remote control commands:

- 1) First of all, choose the right brand of remotes control on this piece of paper, and it will be entered through the DIP switch.
- 2) Press the learning button and the LED turns on. Press the button on the remote control, the LED flashed 2 times, and this button successfully enters the RX-Multi.
- 3) Repeat step 2 for the other button.
- 4) 2 channels are jogging working state.

Clear all data from memory card:

Press and hold the learning button and the LED starts to light up.

Keep holding this button, until the LED indicator light off. All data in the memory card will be permanently deleted.

6. WIFI distribution network:

- 1) Press and hold the K1 and K2 buttons at the same time, and the controller digital tube will display "a".
- 2) K1 and K2 keep pressed, after 5S, when you see the controller digital tube display "-" and flashing quickly, Release K1 and K2, and the WIFI module enters the configuration state.
- 3) Add devices through the mobile APP and configure the network through WIFI mode.

Brand Selection

Item	Selection Dipswitch	Marcas /Brands	Frec.	Observations
1		NICE FLORS	433.92MHz	
2		MARANTEC	433.92MHz	
3		UNIVERSALFIXE CODE/CODIGO FIJO	433.92MHz	Fixe code
4		FAAC XT4/XT2 433RC	433.92MHz	
5		Universal Rolling code	433.92MHz	433.92MHZ
6		CODIGO FIJO	300.00MHz	frec.300.00MHz
7		CODIGO FIJO	310.00MHz	frec.310.00MHz

Brand Selection

8		CODIGO FIJO	315.00MHz	frec.315.00MHz
9		CODIGO FIJO	318.00MHz	frec.318.00MHz
10		CODIGO FIJO	330.00MHz	330.00MHz
11		CODIGO FIJO	390.00MHz	390.00MHz
12		Rollingcode fixe code	315.00MHz	
13		Hormann Marantec Berner	868.00MHz	
14		HormanEcostar	433MHz	
15		Sommer	868.00MHz	

Brand Selection

16		BFT	433MHz	
17		BENINCA	433MHz	
18		KEY	433MHz	
19		NICE-SMILO	433MHz	
20		FAAC XT4/XT2 868RC	868.00MHz	

