

L.E.D. 25 meters  
IR Illuminator

# CPT-IR150L

## SPECIFICATION

<b>Illumination angle</b>	90°
<b>Illumination distance</b>	<b>Center:</b> 25m, <b>Corner:</b> 10m
<b>Illumination spectrum</b>	880nm (850nm ~ 900nm)
<b>Light sensor</b>	CDS at 58 ± 10 lux
<b>Power consumption</b>	DC12V, 22W, <b>Illumination:</b> 130 to 1200 Lux
<b>Body dimension</b>	Window: 175(W) x 150(H)mm, <b>Depth:</b> 135mm



### Features & Characteristic:


- \* IR L.E.D. lamp for illumination
- \* Internal CDS light sensor detector, Auto illumination under weak light source  
Illumination auto shut down under enough light
- \* Suitable for Outdoor long hours usage

L.E.D. 15 meters  
IR Illuminator

# CPT-IR3 series

## SPECIFICATION

MODEL NO.	IR3-10	IR3-15
<b>Illumination distance</b>	10 meters	15 meters
<b>Illumination spectrum</b>	880nm (850nm ~ 900nm)	
<b>Light sensor</b>	CDS at 58 ± 10 lux	
<b>Power consumption</b>	DC12V, 22W, <b>Illumination:</b> 130 to 1200 Lux	
<b>Body dimension</b>	105 (Ø) x 170 (L) mm, 0.6 Kgs	

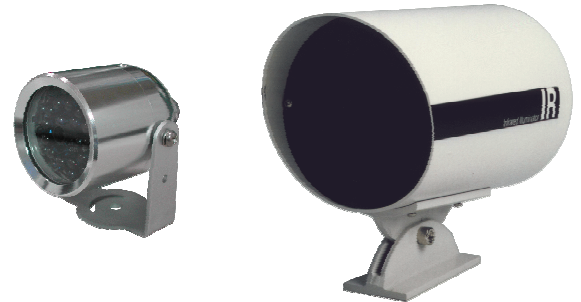

### Features & Characteristic:

- \* IR L.E.D. lamp for illumination
- \* Internal CDS light sensor detector, Auto illumination under weak light source  
Illumination auto shut down under enough light
- \* For outdoor Weather proof IP-55

L.E.D., Medium power, Medium distance,  
IR Illuminator

# CPT-IR98L

## SPECIFICATION

<b>Illumination angle</b>	60°
<b>Illumination distance</b>	8 meters
<b>Illumination spectrum</b>	880nm (850nm ~ 900nm)
<b>Light sensor</b>	CDS at 58 ± 10 lux
<b>Power consumption</b>	DC12V, 18W, <b>Illumination:</b> 130 to 1200 Lux
<b>Body dimension</b>	Window: 155(W) x 95(H)mm, <b>Depth:</b> 45mm



### Features & Characteristic:

- \* IR L.E.D. lamp for illumination
- \* Internal CDS light sensor detector, Auto illumination under weak light source  
Illumination auto shut down under enough light
- \* Suitable for long Hours usage.