


Portable 1 channel
Pan/Tilt/Zoom remote controller

CPT-130K

SPECIFICATION

Joystick control	Up / Down, Left / Right Zoom in/out , Focus far/near , Iris open/close Auto / manual PAN
Lens control	Supply Lens voltage DC $\pm 8V \sim \pm 12V$ / 150 mA , Internal adjustable
Terminal connector	DIN 6p, Output voltage as input voltage, Lens: DIN 5p
Power switch	Front panel, Safety protection fuse: 1A
Power voltage	AC110V / AC220, Option (AC24V), 50Hz/60Hz
Casing structure	Metalic structure, color Ivory
Ambient temperature	Operation: $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$, Storage: $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Body dimension	220(W) ´ 50(H) ´ 200(D) mm – 2 Kg

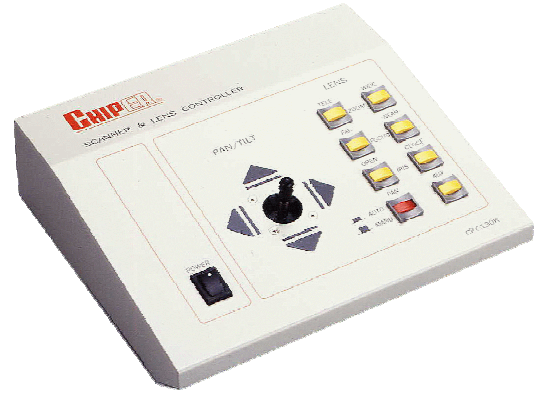

Portable 1 channel Variable speed feature
Pan/Tilt/Zoom remote controller

CPT-130K/VS

SPECIFICATION

Joystick control	Up / Down, Left / Right Zoom in/out , Focus far/near , Iris open/close Auto / manual PAN
Variable speed	Pan /tilt adjustable speed range 0.15 ~ 80°/ sec.
Lens control	Supply Lens voltage DC $\pm 8V \sim \pm 12V$ / 150 mA , Internal adjustable
Terminal connector	DIN 6p, Output voltage as input voltage, Lens: DIN 5p
Power switch	Front panel, Safety protection fuse: 1A
Power voltage	AC110V / AC220, Option (AC24V), 50Hz/60Hz
Casing structure	Metalic structure, color Black
Ambient temperature	Operation: $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$, Storage: $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Body dimension	220(W) ´ 50(H) ´ 200(D) mm – 2 Kg

