





## YET863PC-V2

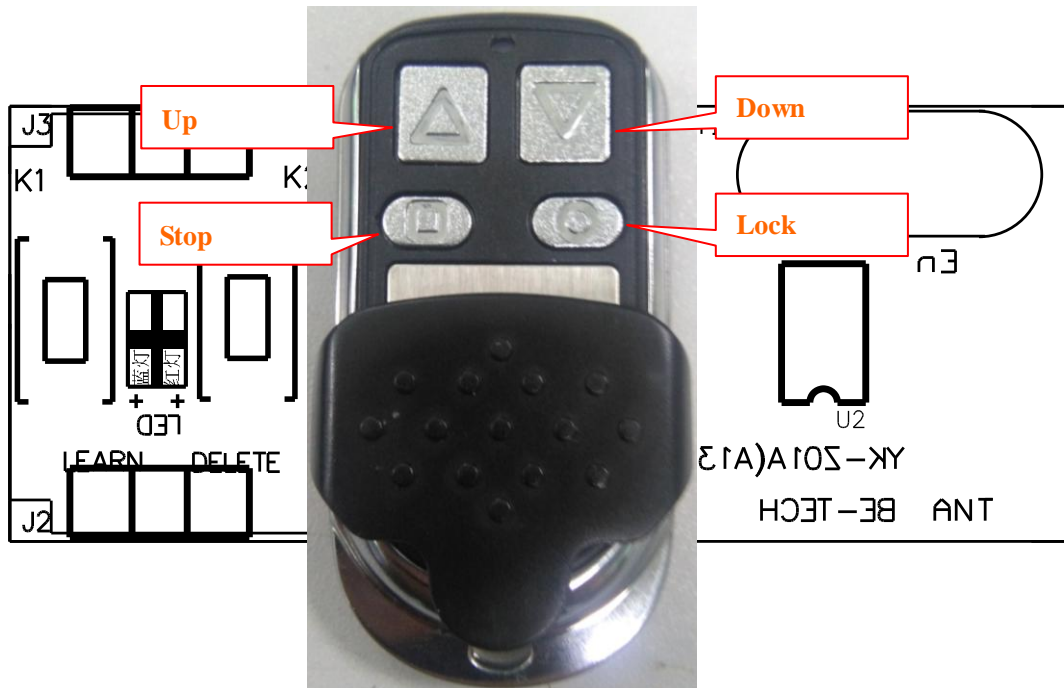

Our factory design and produce the tube motor controller (YET863), this kind of wireless receiving control is high stable characteristics, low power consume and very convenience, it is unnecessary adopt the traditional wire jumper or dip switch code but only receive and store the wireless signal from the remote control, and it can match with remote control.

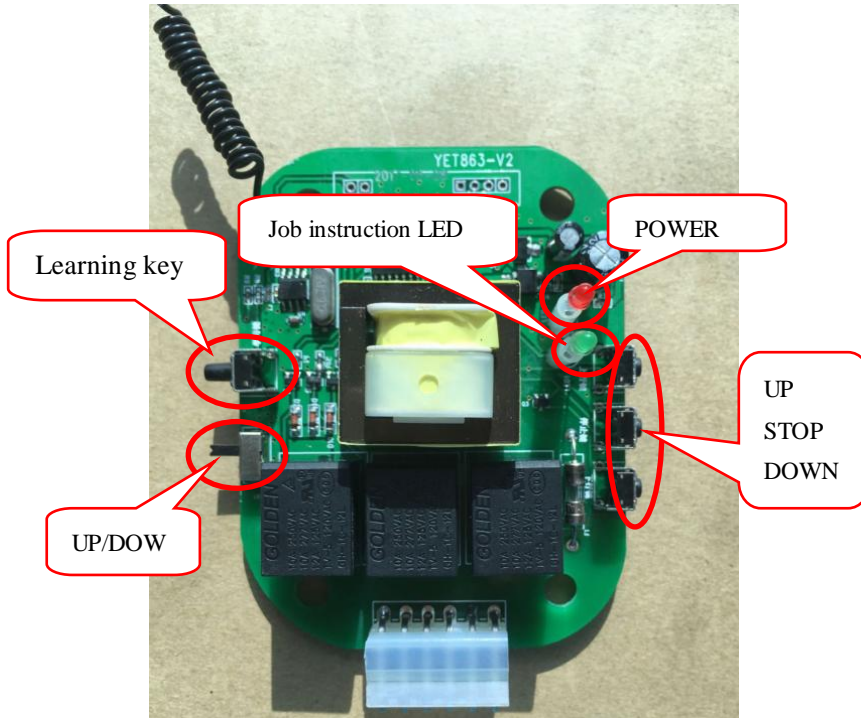

---

### 一、Main function operating

1. Press the Up key of controller to control motor reversal, and maximum working time of the motor is 2 minutes.
2. Press the Down key of controller to control motor reversal, and maximum working time of the motor is 2 minutes.
3. Press the Stop key of matched remote control, and the controller stops working.
4. Press the Up key of matched remote control to control motor forward, and maximum working time of the motor is 2 minutes.
5. Press the Down key of matched remote control to control motor reversal, and maximum working time of the motor is 2 minutes.
6. Press the Stop key of matched remote control, and the controller stops working.
7. Press the Lock key of matched remote control, and the controller stops working and latching. At this time, manual operation can't be controlled on the remote control and control board, just can regain control by unlocking the remote control.
8. The controller is in the working state, the status indicator flashes at 0.5S frequency.

### 二、main technical parameters

- |  |                                    |
|--|------------------------------------|
| 1、Working voltage: AC220V                    | 2、Working temperature: -40℃ - +80℃ |
| 3、Receiving sensitive: $\geq -110\text{dBm}$ | 4、Working frequency: 433.92MHz     |
| 5、Code type: Rolling code                    | 6、Controller capacity: 15pcs       |

### 三、Learning and Clearing code

#### Learning code:

Press the Learning key, it is learning state when the status indicator lights. Let go of the Learning key, the remote control can be configurable within 5S.

Press the any key of need learning remote control, the status indicator flashes a few times quickly, and show learning into succeed.

Press the Up and Down key 8S of remote control at the same time, it is learning state when the status indicator flashes a few times quickly. Let go of the keys, the remote control can be configurable within 5S. Press the any key of need learning remote control, the status indicator flashes a few times quickly, and show learning into succeed.

#### Clearing code:

Long press the learning key 8S, the remote control is deleted until the status indicator is out.