



PATENTED



VERSO

THE NEW LANDMARK FOR CAMERA HOUSINGS

Innovative and stylish housing, designed to simplify installation and servicing, VERSO ensures total protection against all environmental conditions. Thanks to its side opening, the accessibility to the camera, lens and all its connections is made far easier.

Entirely manufactured from the newest, most solid, technopolymer, VERSO guarantees elevated impact resistance, high weather protection to external agents and UV rays.

Its weatherproof features are ensured by EPDM-rubber gaskets and 3 cable glands with their specific gaskets.

VERSO offers the possibility of various different mountings, wall mounting bracket, feed through bracket and Pan & Tilt head, including the ability to house most combinations of cameras and lenses. A wide range of accessories is available, including sunshield, heater kit, blower kit, camera power supply and tamper switch.

CCTV ACCESSORIES AND SYSTEMS

HEADQUARTERS:

VIDEOTEC s.r.l.

Via Lago Maggiore, 15

I-36015 SCHIO (VI) Italy

Tel. +39.0445.697411 Fax +39.0445.697414

E-mail: info@videotec.com www.videotec.com

FRANCE BRANCH:

VIDEOTEC FRANCE

41, Rue des Jons

F-27400 Heudreville sur Eure, France

Tel. +33.02.32094900 Fax +33.02.32094901

E-mail: videotec.yr@wanadoo.fr www.videotec.com

ASIA BRANCH:

VIDEOTEC (HK) Ltd

Unit 2,8/F, Vanta Industrial Centre 21-33 Tai Lin Pai Road

Kwai Chung, NT, Hong Kong

Tel. +852.2333.0601 Fax +852.2311.0026


E-mail: info@videotec.com.hk www.videotec.com.hk

- Indoor/Outdoor installations
- Entirely made of technopolymer, color RAL9002
- Side opening system, easy camera service
- Weatherproof Standard IP66
- CE Compliant
- Flame retardant V1 according to UL94
- Operating temperature with heater from -20°C to +50°C (-4°F to 122°F)

- Different mounting options: standard bracket, feed-through bracket or Pan&Tilt
- 2 x PG9, 1 x PG11 removable cable glands
- Thermostat controlled heater, blower, camera power supply and tamper switch
- Length: 422 mm (166.14 in)
- Weight: 1,2 Kg (2.64 Lb)

MECHANICAL FEATURES	VERY GOOD	GOOD	LOW
Impacts	✓		
Temperature	✓		
UV Rays	✓		
Flame retardant	✓		

CHEMICAL FEATURES	VERY GOOD	GOOD	LOW
Inorganic acids		✓	
Organic acids		✓	
Basics	✓		
Alcohols	✓		
Gasses	✓		
Hydrocarbons	✓		
Oils		✓	
Solvents			✓

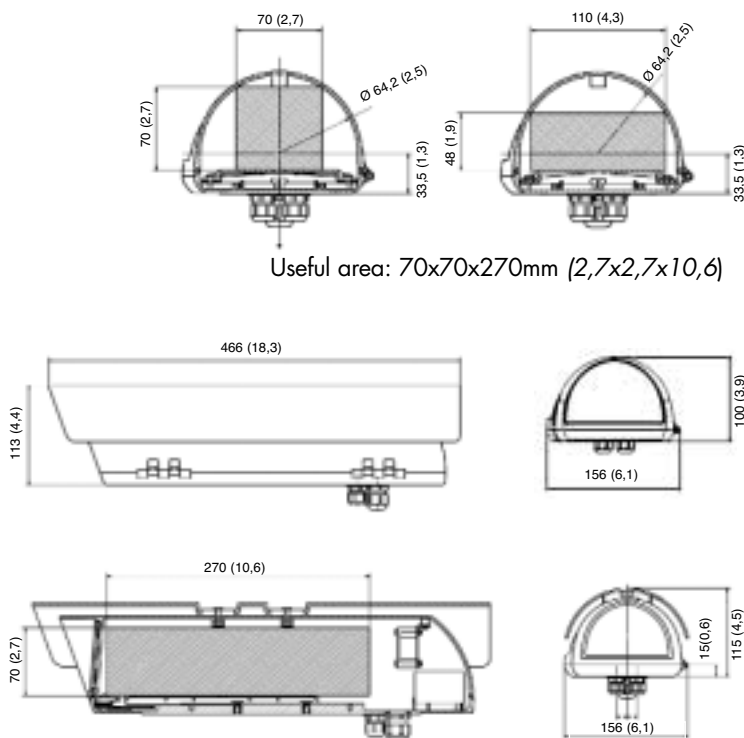

NOTE: VALUES IN PARENTHESIS ARE INCHES.

MODELS AND ACCESSORIES

HPV42K1A000	Housing with sunshield and heater 110/230V~, 40W
HPV42K2A000	Housing with sunshield and heater 12V~/24V~, 20W
HPV42K0A000	Housing with sunshield
HPV42D0A000	Housing
HPV42K2A063	Housing with sunshield and fan assisted heater 24V~
OHPVS42A000	Sunshield
OHPVTA	Connection board and tamper switch
OHPVPS1	Camera power supply in 100-240V~, 47/63 Hz, out 12V~, 1A
OHPVPS2	Camera power supply in 230V~, 50 Hz, out 24V~, 400mA
OHPVH1	Heater 110/230V~, 40W (ON: < 14°C, < 39°F; OFF: >20°C, > 68°F)
OHPVH2	Heater 12V~/24V~, 20W (ON: < 14°C, < 39°F; OFF: >20°C, > 68°F)
OHPVV12	Blower kit 12V~, 4W
OHPVV24	Blower kit 24V~, 4W
OHPVV230	Blower kit 230V~, 4W

