

B614

Automatic barrier 24V



Max beam length

6 m

Opening time

<2 s (80° with 3 m beam)

Use frequency

Continuous use

- Maximum Anti-crushing safety and motor with integrated encoder
- Speed adjustment and smooth operation.
- Integrated control unit in the upper part of the beam body, i.e easy maintenace and intuitive programming



Watch the video
vimeo.com/faacgroup/b614-en



DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	B614
Power supply voltage	220-240V ~ 50/60 Hz
Electric motor	With brushes 24V ---
Max. power	165 W
Max. torque	300 Nm
Material type	Steel
Type of treatment	Pre-hot dip galvanized, 20µm thick + polyester powder coated
Encoder	Incremental integrated in the motor
Type of deceleration	Electronic + mechanic
Type of beam	Rectangular and round
Operating ambient temperature	-20°C ÷ +55°C
Protection class	IP55 (Electronic control unit) - IP44
Weight	40 Kg
Dimensions (LxDxH)	360 x 250 x 1163 mm (installation base 305 x 230 mm)
Beam max length	6 m
Opening time	< 2 s (80°- 3m)
Use frequency	Continuous use
Electronic equipment	E614

(*) data referred to 230V~ 50Hz.

FAMILY MODELS

Model	Item code	Price €
B614 Red RAL 3020	104614	1,517.50
B614 Grey RAL 9006	1046143	1,517.50

PACKS

B614 includes: barrier cabinet, electromechanical gearmotor and transmission unit, electronic control unit, installation accessories, a triangular release key.

Typical Installation Examples page. 306

ELECTRONIC CONTROL UNITS



E614 Control unit
(built-in)
Info at page 156

63001034 € 490.00

COMMON ACCESSORIES FOR ALL APPLICATIONS



Skirt kit length 2 m

428441 € 176.00



Skirt kit length 3 m

428446 € 260.00



Adjustable end foot for
beam support

428805 € 112.50



Support plate for fork

737621 € 15.00



Adjustable fork for
beam support

428806 € 183.50



Foundation plate

490183 € 37.50

>>



B614 integrated
flashing traffic light

410032 € 81.00



Supplementary
triangular release key
(10 pcs. pack)

713002 € 1.50



XBAT 24 emergency
battery kit *

390923 € 133.00

OTHER ACCESSORIES

Key operated buttons
page 182

Laser Sensors
page 197

Transmitters and receivers
page 174

Photocells and columns
page 190

Flashing lights
page 200

Various accessories
page 201

ROUND BEAMS S - Ø 75MM (ADHESIVE LABLES NOT INCLUDED) AND SPECIFIC ACCESSORIES

Length (mm)	Item code	Price €
2.000 *	428046	118.00
2.300	428045	138.00
3.300	428042	168.00
4.300 *	428043	205.00
5.000	428002	240.50
Joint *	428615	42.50

The round S beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.

* Codes to be purchased in order to obtain 6mt boom



Fixing bracket for round beams S 615/620/B614 ♦



Articulated kit for round beam S (max 4 m)



Luminous cord 12 m pack

428445	€ 148.00	428444	€ 582.00	390993	€ 127.50
--------	----------	--------	----------	--------	----------

>>

BALANCING SPRINGS FOR ROUND BEAMS S



Adhesive reflector kit (6 pcs.)



Beam light connection kit



Balancing spring for B614



Double spring fittings pack ♦



Balancing spring for 6mt boom barrier




Joint and tie rod kit for B614

490117	€ 15.50	390992	€ 28.50	721209	€ 28.00	490186	€ 16.50	721232	€ 30.00	428715	€ 36.00
--------	---------	--------	---------	--------	---------	--------	---------	--------	---------	--------	---------

NUMBER OF NEEDED SPRINGS

Number of springs	Beam (mm)	With lights (mm)	With skirt (mm)	Beam with end foot (mm)	With lights and end foot (mm)	Beam with lights and skirt (mm)	Beam with skirt and end foot (mm)	Beam with lights, skirt and end foot (mm)	With articulation kit (mm)
1	1900 ÷ 4400	1800 ÷ 4150	1700 ÷ 3740	1400 ÷ 3750	1400 ÷ 3650	1550 ÷ 3550	1750 ÷ 3250	1750 ÷ 2540	2300 ÷ 3300 3310 ÷ 3800 (if A≤2500) 3810 ÷ 4800 (if A≤2200)
2	4410 ÷ 4900	4160 ÷ 4900	3750 ÷ 4900	3760 ÷ 4900	3660 ÷ 4900	3560 ÷ 4900	3260 ÷ 4550	2550 ÷ 4100	3310 ÷ 3800 (if A>2500) 3810 ÷ 4800 (if A>2200)
2	4900 ÷ 6000	4900 ÷ 6000							

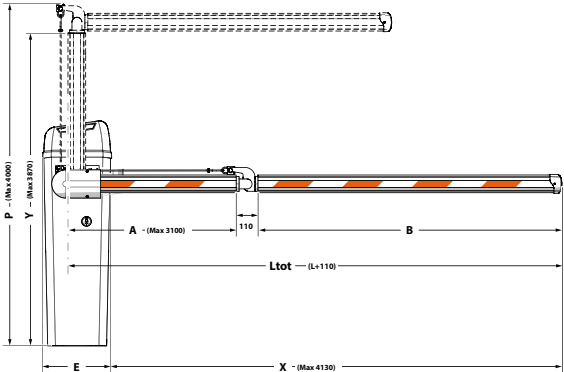

Misure (mm)
Dimensions (mm)
Größe (mm)
Dimensie (mm)

A	P - 900
B	L - A
E	360
X	L - 170
L	A+B (Max 4300)

NOTE

- ♦ Use if two balancing springs are required.
- ♦ The beam bracket is not included in the cabinet and must be ordered separately

RECTANGULAR BEAMS AND SPECIFIC ACCESSORIES

	Length (mm)	Item code	Price €
	2.315	428088	138.00
	2.815	428089	151.00
	3.815	428090	168.00
	4.815	428091	181.50
The rectangular beams are supplied with protective rubber and for balancing reasons it is not possible to install on the beam profile the "active" safety edge.			

Rectangular standard beam



Beam bracket for rectangular beam ♦



Articulation kit - H max ceiling 3 m (only for rectangular standard beams)

428342 € 58.50 428137 € 316.50

>>

BALANCING SPRINGS FOR RECTANGUAL BEAMS



Beam light connection kit



Luminous cord 12 m pack



Rectangular beam light connection kit ♦



Balancing spring for B614




Double spring fittings pack ♦

390992 € 28.50 390993 € 127.50 390184 € 78.50 721209 € 28.00 490186 € 16.50

NUMBER OF NEEDED SPRINGS

Number of springs	Beam (mm)	With lights (mm)	With skirt (mm)	Beam with end foot (mm)	Beam with skirt and end foot (mm)	With articulation kit (mm)
1 	1850 ÷ 4300	1800 ÷ 4100	1650 ÷ 3800	1350 ÷ 3700	1750 ÷ 3350	1850 ÷ 2815
						2816 ÷ 3315
						(if A ≤ 1600)
						3316 ÷ 3815
2 	4310 ÷ 4810	4110 ÷ 4810	3810 ÷ 4810	3700 ÷ 4810	3360 ÷ 4700	(if A ≤ 1250)
						2816 ÷ 3315
						(if A > 1600)
						3316 ÷ 3815
						(if A > 1250)

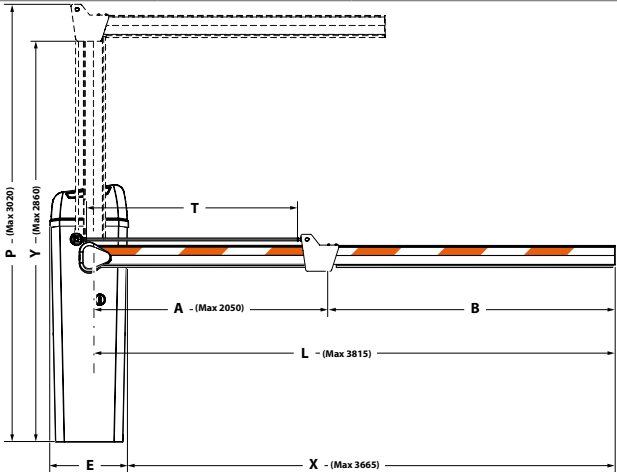

Misure (mm)
Dimensions (mm)
Größe (mm)
Dimensie (mm)

A	P - 970
B	L - A
T	A - 50
E	360
X	L - 150

NOTE

- ♦ The beam bracket is not included in the cabinet and must be ordered separately
- ♦ Use if two balancing springs are required.
- ♦ Replace the black shockproof rubber profile with the red one supplied when installing the kit. The kit cannot be used together with other accessories installed on the beam.