


Double Ports Gigabite PoE Injector

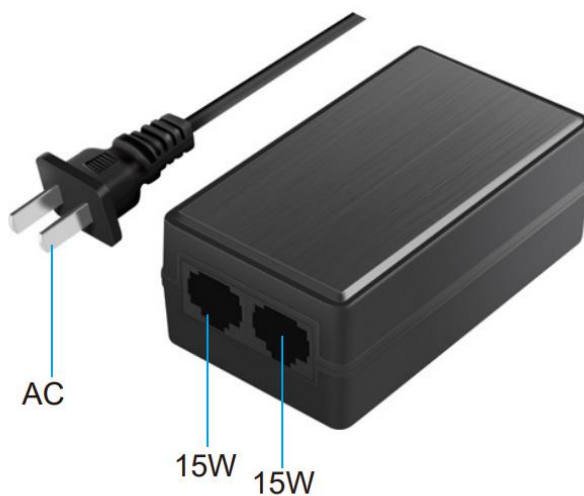

GNT-53003

Output power consumption up to 15W
 100m Transmission
 2 RJ45


Product Features

Double PoE Input/Output
 No fan, no noise, dustproof
 5KV Lightning & 8KV ESD Protection

Specifications

Interface	Input Voltage: 100-240V AC @50/60Hz
PoE	Data Input/ PoE output: 2 RJ45 PoE Power Output: DC 52V/18 watts max Power Pin Assignment: Pair1: 1/2(+)/3/6 (-)
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet
Ethernet Port	Transmission Rate: 10/100M /1000Mbps Distance: 100m(Max.)
Protection	Lightning Protection:5KV. Per: IEC61000-4-5 ESD Protection:8KV. Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 112*45*32mm, Weight: 0.35KG
Protection	Lightning Protection:5KV. Per: IEC61000-4-5 ESD Protection:8KV. Per: IEC61000-4-2
Working Environment	Operating Temperature: -30°C~55°C Storage Temperature: -40°C~85°C Humidity: 0%~95% Non-condensing
Color	Black
Warranty	Whole Device: 1 year

PoE Injector connection diagram

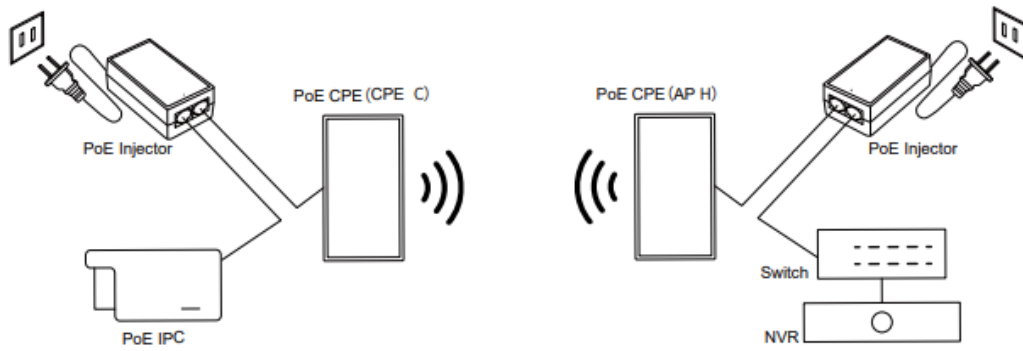

Dimension (mm)

