


# Double Ports Gigabit PoE Injector

## GNT-53003

- Output power consumption up to 15W
- 100m Transmission
- 2 RJ45
- Double PoE Input/Output
- No fan, no noise, dustproof
- 5KV Lightning & 8KV ESD Protection

## Product Features


### Ports Description



### Specifications

Model	GNT-53003
Interface	Input Voltage: 100-240V AC @50/60Hz
	Data Input/ PoE output: 2 RJ45
PoE	PoE Power Output: DC 52V/18 watts max
	Power Pin Assignment: Pair1: 1/2(+)/3/6 (-)
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX
	IEEE 802.3ab 1000BASE-T
	IEEE 802.3x Flow Control
	IEEE 802.3af Power over Ethernet
Ethernet Port	Transmission Rate: 10/100M /1000Mbps
	Distance: 100m(Max.)
Protection	Lightning Protection:5KV. Per: IEC61000-4-5 ESD Protection:8KV. Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 77*43*28mm, Weight: 0.35KG
Working Environment	Operating Temperature: -30°C~55°C
	Storage Temperature: -40°C~85°C
	Humidity: 0%~95% Non-condensing
Color	Black
Warranty	Whole Device: 1 year

### Dimension (mm)

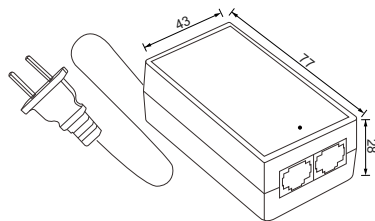

### PoE Power adapter connection diagram

