



PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS

I5PT-320IPMX10-P
I5PT-320IPMX4-P



Main Features:

- ONVIF
- PoE Support
- Dual Video Stream
- H.265/H.264 Video Compression
- 50m IR Distance
- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- 250° Pan Rotation
- 65° Continuous Tilt
- 256 Preset Position
- Park Action (Preset)
- Fully function web-client
- 3D-DNR Noise Reduction
- Digital WDR
- IP66 Water-proof and Dust-proof
- Excellent High Resolution Picture Quality
- True Day/Night with ICR Filter
- Enhanced Noise Reduction
- WB/BLC/AGC

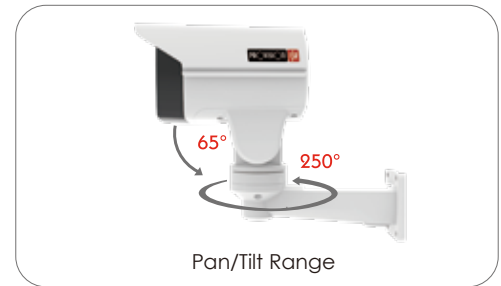

Specifications

		I5PT-320IPMX10-P	I5PT-320IPMX4-P	
Camera	Video	Model	I5PT-320IPMX10-P / I5PT-320IPMX4-P	
		Image Sensor	1/2.9" CMOS	
		Effective Pixels	1920×1080	
		Sync System	Progressive Scan	
		Electronic Shutter	1/25s ~ 1/10000s	
		Day & Night	ICR (Auto/Day/Night)	
	Lens	Min. Illumination	0.005 Lux (Color), 0.01 Lux (B&W), 0 Lux (IR On)	
		S/N Ratio	>52dB	
		Optical Zoom	x10 (5.1-51mm)	x4 (2.8-12mm)
		Digital Zoom	No	
Audio	Focus	Auto / Manual		
	Minimum Focus Distance	1.5m		
	Horizontal Angle of View	H: 50.4°(Wide) to 5.4°(Tele)	81.2°(Wide) to 22.6°(Tele)	
Image Enhancement	Audio compression	No		
	Communication	No		
	Image Settings	AWB Adjustable		
		Exposure Mode		
	BLC	Sharpness, Saturation, Brightness & Contrast Adjustable		
		Auto Gain Adjustable		
	Sense-Up	Yes		
		Yes (5 Levels)		
	WDR Range	Digital WDR		
		3D-DNR		
Noise Reduction	Mirror/Flip			
	Yes			
Image Orientation	Yes			
	Yes			
Compression	Video Compression	H.265 (HEVC), H.264 Main Profile MJPEG/JPEG Baseline		
	Resolution	Main Stream: 1080P, 720P Sub-Stream: D1, CIF		
	Multi-stream	1920x1280 (1~30fps) 1280x720 (1~30fps) D1 (1~30fps) / CIF (1~30fps)		
	Bit rate	64Kbps ~ 8Mbps		
	Encode Mode	VBR/CBR		
	Image Quality	Six levels under VBR; Free adjustment under CBR		

Network	Remote Monitoring	IE Browsing, Ossia VMS Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, HTTP, IPv4, IPv6
	ONVIF	Yes
Ethernet	Ethernet	100Mbps
	PoE	Yes
Pan/Tilt	Pan/Tilt Range	250° Pan / 65° Tilt
	Pan/Tilt Speed	Max Preset Speed: 12°/s Manual: 0.5°~12°/Sec (Proportional to Zoom)
	Presets	255
	Patterns	No
Housing	Cruise	No
	Scan	No
	Schedule	No
	IR Distance	50m
	Water-proof	IP66
	Wiper	No
	Fan & Heater	No
Connectivity	Bracket	Wall Bracket
	Dimensions	225*175*94mm
	Weight(gross)	920gr
	Network	RJ45 (+PoE)
	Power	DC Socket / PoE
	Analog Video Output	No
Others	Audio Connectivity	No
	SD Card	No
	RS485	No
	Alarm	No
Power Supply	12VDC/2A (Not supplied) / PoE(~10W)	
Work Environment	-20 C ~50 C, 10%~90% Humidity	