


24 Port 10/100 Mbps + 2Combo PoE Switch

PoES-24370+2Combo

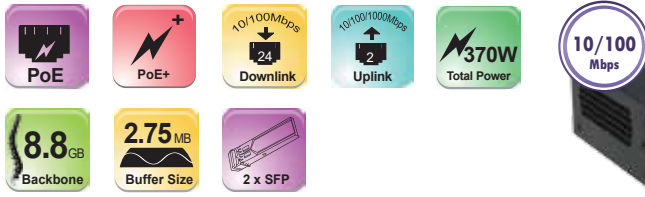

- Downlink: 16x100Mbps Ports
- Uplink: 2x1Gbps Port or 2 SFP (Combo)
- 370W (Avg:15W Max 30W per ch)
- Internal Power Supply
- Distance: Up to 100 Meter
- Built-in Surge Protection
- Complies With IEEE802.3af/at
- Rack mount bracket included

Specifications

MODEL	PoES-24370+2Combo	
Interface	Downlink Ports	24 x 10/100Mbps
	Uplink Ports	2 x 10/100/1000Mbps
	SFP Ports*	2 x 1Gbps
PoE	PoE Ports	24 (Downlink Ports)
	PoE Standard	IEEE802.3af/at PoE
	PoE Total Power	370W
	Average Power Per Channel	15.4W
	Maximum Power Per Channel	30W
Data Processing	Backbone Bandwidth	8.8Gbps
	Buffer Size	2.75Mb
	MAC Address Table	4K
	VLAN	No
Network Media	EIA/TIA-568	100Ω STP (Maximum 100m)
	10BASE-T	UTP Category 3, 4, 5 Cable (Maximum 100m)
	100BASE-TX	UTP Category 5, 5e Cable (maximum 100m)
	1000BASE-T	UTP Category 5e, 6, 7 Cable (Maximum 100m) [For Uplink Ports Only]
Special	CCTV Mode	No
	Surge Protector	Built-In
	Wall Bracket	No
	Rack Bracket	Yes
	K-Slot (Anti Theft)	Available
Power	PoE Status Monitor	No
	Power Supply	100-240VAC
Others	Power Consumption	PoE On: 385W Max. / PoE Off: 15W Max.
	Fan	No
	Dimensions	440*200*44mm
	Weight	4kg
	Operating Temperature	-0°C-40°C

*Uplink Ports cannot work simultaneously with the SFP ports



LED Status display



Combo Slot (1000Mbps RJ-45 / SFP)