


Three Mode WiFi Switch

Model: TYWB-4CH 7-32V RF




Parameters:

- Input Voltage: DC 7V-32V or USB 5V
- Max Current: 2000mA/10A/Gang
- Max Load: 3500W/16A/4gang
- Wireless-Wi-Fi: 2.4ghz b/g/n Bluetooth
- Radio Frequency: 433MHz
- Working Temperature: -20°C~70°C
- Size: 75*73*20mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth of the phone.
- You have the correct WiFi PWD.
- You smart phone or tablet must have access to App store/Google play.
- Your router is MAC-open.

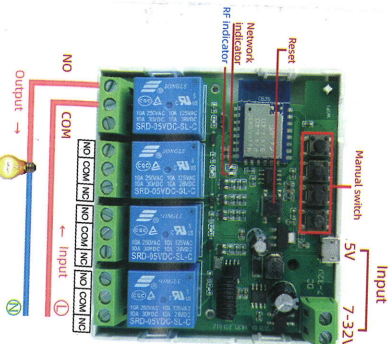

User Guide


- You can download the App by searching "Tuya Smart" in mobile app stores or scanning the following QR code



- Register an Tuya Smart account. Just login.

Add devices

- Reset the device first:
 - if the network indicator (red light) blinking fast ① for 10 seconds.
 - hold down the Reset button for 5 seconds.
 - until network indicator (red light) blinking fast, make your device entered pairing mode.
- Clicking ② in the top right corner on Tuya smart app, wait a few seconds, after the devices are found, click "Add".



- Select a 2.4GHz Wi-Fi network and enter your password.


Name your device.




- When the network is disconnected, the switch will automatically switch to the Bluetooth control of the phone.

- Click the on/off buttons on the App can control device. Manual control switch also can be display real-time on the App.

APP Function



- Long press the switch icon to open the control panel.
 - ① Rename /Offline Notification /Share Device /Remove Device
 - ② Long press the switch icon to open the control panel.

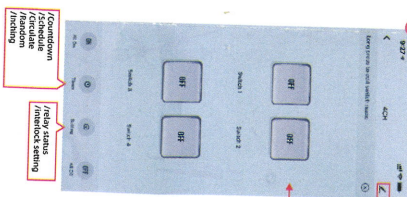

Remote control matches the code



- Matching:
- ① Hold the manual switch for 3 seconds you will hear the indicator (blue light) on.
 - ② Then long press the remote control button you want to match.
 - ③ Press other buttons, repeat steps ① to ③, matching success.
 - ④ Long press the manual switch for 15 seconds you want to clear (RF) pairing indicator is always on, until RF indicator (blue light) is off, then loosen the manual switch.
- Note: The matching code method is only available with RF function.

TRUBLESHOOTING

Enter the homepage of App, click the icon in the lower right corner of the interface to enter.

