



## KEYPADS

# CA-5 KLCD-L CA-5 BLUE-L

ca5klcd-l\_e 03/06

The CA-5 KLCD-L and CA-5 BLUE-L keypads are designed for operating and programming the CA-5 control panel. They differ in the color of display and key backlight, which is green in the CA-5 KLCD-L keypad, and blue in the CA-5 BLUE-L keypad.

Each keypad has 16 keys which enable the operator to navigate through the menu, enter data, and start selected functions. It is also provided with a buzzer to confirm keypad operations and signal events occurring in the alarm system.

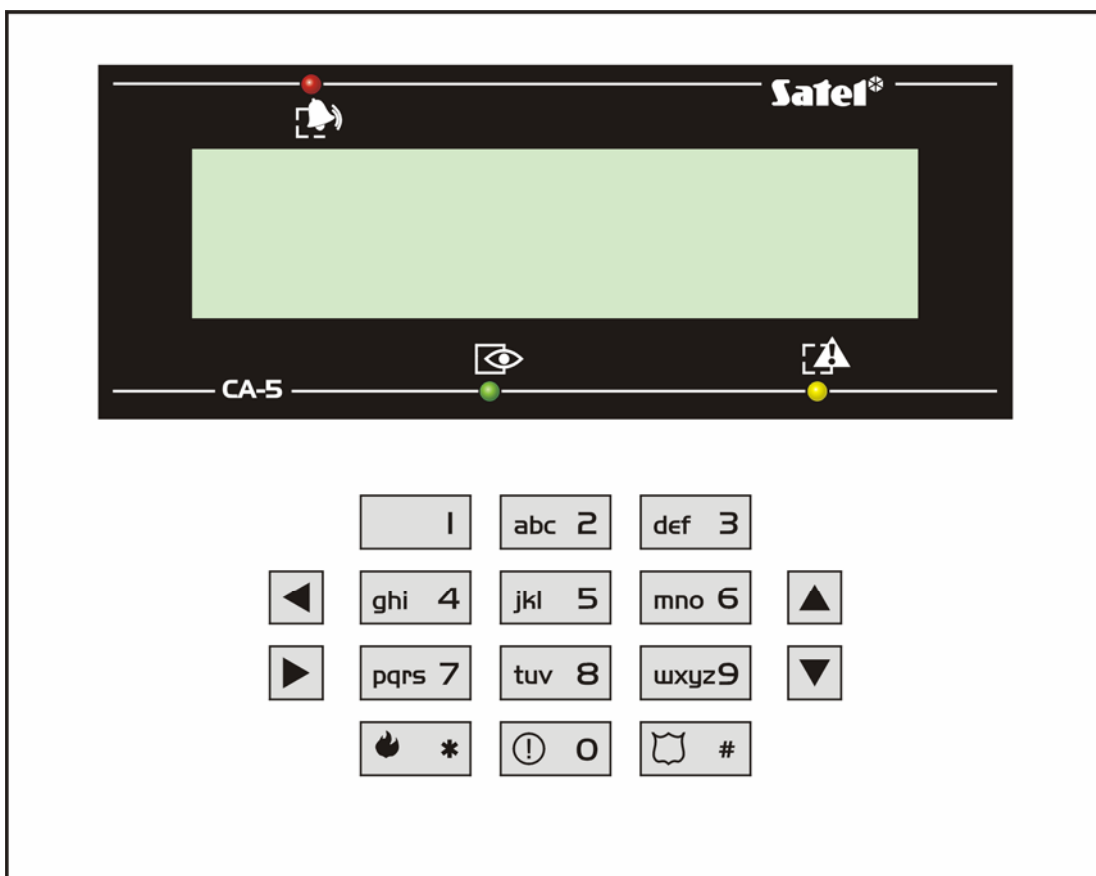


Fig. 1. View of the keypad.

3 LED indicators show the current status of the system:



**ALARM** (red color) - alarm is signaled by the LED blinking. The LED goes out after alarm reset.



**ARMED** (green color) - the LED is ON with the system armed. The blinking LED indicates the countdown of the exit delay time.



**TROUBLE** (yellow color) – blinking LED indicates a failure in the alarm system.

For further information regarding the installation and operation of the keypad please refer to the **INSTALLER MANUAL** and **USER MANUAL** of the CA-5 alarm control panel.

## Technical data

---

Nominal supply voltage ( $\pm 15\%$ ).....	12V DC
Average current consumption.....	61mA
Operating temperature range .....	-10°C...+55°C
Housing dimensions (width x height x thickness).....	145x115x26mm

The latest EC declaration of conformity and product approval certificates are available for downloading on the [www.satel.pl](http://www.satel.pl) website



SATEL sp. z o.o.  
ul. Schuberta 79  
80-172 Gdańsk  
POLAND  
tel. + 48 58 320 94 00  
info@satel.pl  
www.satel.pl