

# Satel

INDOOR ACUSTIC  
SYGNALING DEVICE  
**SPW-100**



spw100\_e 06/04


Acoustic signaling device SPW-100 is made of an impact resistant ABS plastic. It is designed to be used in burglary and assault alarms as well as in fire-protection signaling systems.

## INSTALLING

SPL-1010 should be mounted on flat vertical basis in inaccessible place in order to minimize tampering possibility. The screws, siren should be mounted with are included.

The SPW-100 should be mounted only inside the protected buildings.

INSTALLING DIAGRAM:

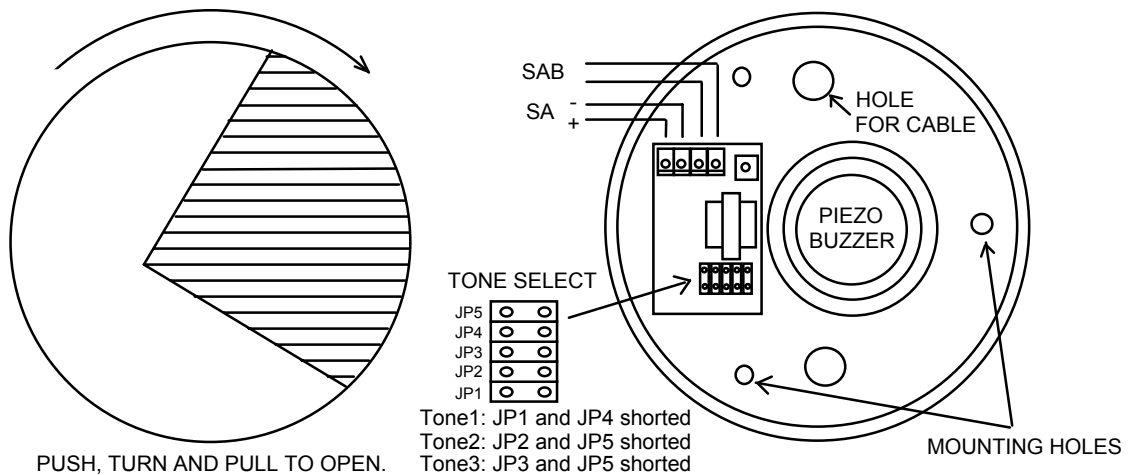

## CONNECTIONS

The signaling device SPW-100 can operate with any equipment which switch on the 12V DC on output to activate signaling.

The device is equipped with pair of **inputs**: "+SA -": when power supply is applied to those inputs (according to polarity), the device starts signaling.

**Connectors " SAB "** are designed for connecting into anti-tampering circuit of security system. Anti-tampering switch of the device protects against opening the cover.

**Pins JP1 +JP5** are designed for choosing the acoustic signaling tone.

## TECHNICAL DATA

power supply ..... DC 12V  $\pm$  20%  
power consumption ..... 60 mA (max. 120mA)  
sound pressure..... more then 120dB  
operating temperature ..... -35°C - +60°C  
dimensions ..... 130x130x30mm  
weight..... 0,14kg

SATEL sp. z o.o.  
ul. Schuberta 79  
80-172 Gdańsk  
POLAND

tel. (+48 58) 320 94 00  
info@satel.pl  
www.satel.pl

Latest EC declaration of conformity  
and product approval certificates  
can be downloaded from our Web  
site **www.satel.pl**

