

suprema

BioEntry W

Outdoor Fingerprint
IP Reader/Controller

IP65 dust & waterproof
IK08 vandal-resistant
Power over Ethernet
Fingerprint & RFID



| BioEntry W |

BioEntry W exquisitely blends benefits of IP access control system with high-level security provided by fingerprint biometrics. Featuring vandal-resistance structure and IP65 rated structure, BioEntry W is ideal for outdoor installation with offering exceptional durability under harsh environment. With its extensive communication interfaces and PoE capability, BioEntry W is truly the ultimate outdoor fingerprint access control device.










SUPrema BioEntry W

Outdoor Fingerprint IP Reader/Controller




Hardware Features

-  **World's Best Fingerprint Recognition Technology**
- Cutting-edge algorithm ranked top in FVC's and MINEX
-  **IP65 Certified Dust & Water Protection**
- Ideal for harsh environment and outdoor installation
-  **IK08 Vandal-resistant Structure**
- Heavy-duty Lexan™ resin housing with doubled thickness
-  **Ultra Performance**
- 1:2,000 matches in 1 second
-  **Power over Ethernet**
- Power supply through a single CAT5/6 wiring
-  **Versatile Interfaces**
- TCP/IP, RS485, Wiegand, relay
-  **RF Card Options**
- HID Prox. Mifare/DesFire, iClass, Felica

Secure I/O


- External Relay unit for secure door control and I/O expansion
- Encrypted communication for enhanced security
 - * 16MHz 8 bit microprocessor
 - * 4 digital inputs and 2 relay outputs
 - * Dimension :
143 x 82 x 35 mm (W x H x D)



Specifications

CPU	533MHz DSP
Memory	8MB flash + 8MB RAM
Fingerprint Sensor	Optical
RF Card Option	HID Prox. Mifare/DesFire, iClass, Felica
Template Capacity	10,000
Max User	5,000
Log Capacity	50,000
Ingress Protection	IP65
PoE	Yes
Interfaces	TCP/IP, Wiegand, RS485, RS232, TTL I/O, relay
Tamper	Switch
Sound	16 bit Hi-Fi voice & sound indication
Operating Temp.	- 20°C ~ 50°C
Operating Voltage	12vDC
Dimensions (mm)	W50 x H172 x D42
Certificates	CE, FCC, KCC, IP65, IK08

System Configurations

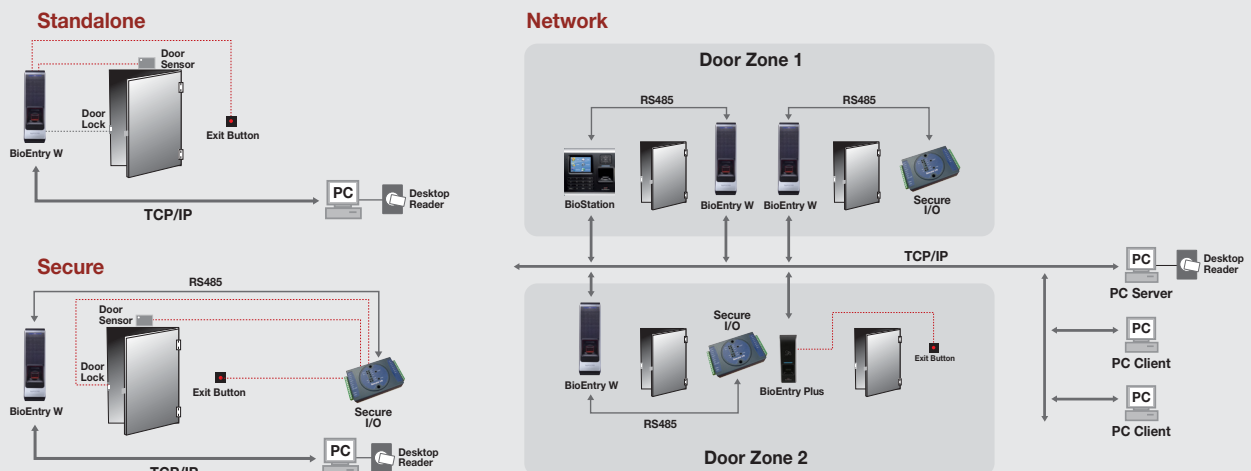

Suprema Inc.

16F Parkview Tower, Jeongja, Bundang, Seongnam, Gyeonggi, 463-863 Korea
Tel : +82-31-783-4502, **Fax :** +82-31-783-4503
E-mail : sales@supremainc.com **Homepage :** www.supremainc.com

