suprema BioEntry W

Outdoor Fingerprint IP Reader/Controller

IP65 dust & waterproof IK08 vandal-resistant Power over Ethernet Fingerprint & RFID



BioEntry WBioEntry W exquisitely blends benefits of IP access control system with high-level security provided by fingerprint biometrics. Featuring vandal-resistance structure and IP65 rated structure, BioEntry W is ideal for outdoor installation with offering exceptional durability under harsh environment. With its extensive communication interfaces and PoE capability, BioEntry W is truly the ultimate outdoor fingerprint access control device.













suprema BioEntry W

Outdoor Fingerprint IP Reader/Controller



Hardware Features



World's Best Fingerprint Recognition Technology

- Cutting-edge algorithm ranked top in FVC's and MINEX



IP65 Certified Dust & Water Protection

- Ideal for harsh environment and outdoor installation



IK08 Vandal-resistant Structure

- Heavy-duty Lexan™ resin housing with doubled thickness



Ultra Performance

- 1:2,000 matches in 1 second



Power over Ethernet

- Power supply through a single CAT5/6 wiring



Versatile Interfaces

- TCP/IP, RS485, Wiegand, relay



RF Card Options

- HID Prox. Mifare/DesFire, iClass, Felica

Secure I/O

- External Relay unit for secure door control and I/O expansion
- Encrypted communication for enhanced security
- * 16MHz 8 bit microprocessor
- * 4 digital inputs and 2 relay outputs
- * Dimension :


143 x 82 x 35 mm (W x H x D)




Specifications

| CPU | 533MHz DSP |
|--------------------|---------------------------------------|
| Memory | 8MB flash + 8MB RAM |
| Fingerprint Sensor | Optical |
| RF Card Option | HID Prox. Mifare/DesFire, iClass SE |
| Template Capacity | 10,000 |
| Max User | 5,000 |
| Log Capacity | 50,000 |
| Ingress Protection | IP65 |
| PoE | Yes |
| Interfaces | TCP/IP, Wiegand, RS485 relay |
| Tamper | Switch |
| Sound | 16 bit Hi-Fi voice & sound indication |
| Operating Temp. | - 20'C ~ 50'C |
| Operating Voltage | 12vDC |
| Dimensions (mm) | W50 x H172 x D42 |
| Certificates | CE, FCC, KCC, IP65, IK08 |
| | |

System Configurations



Network

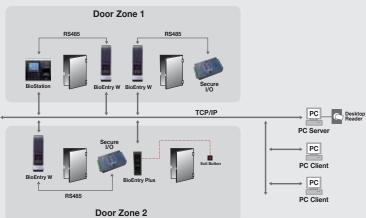

Suprema Inc.

16F Parkview Tower, Jeongja, Bundang, Seongnam, Gyeonggi, 463-863 Korea

 $\textbf{Tel}: +82\text{-}31\text{-}783\text{-}4502, \ \ \textbf{Fax}: +82\text{-}31\text{-}783\text{-}4503$

