


DO NOT SCALE

- 5/ FUNCTION LABEL LETTER SIZE 5mm MAX
- 6/ TERMINALS SUITABLE FOR UP TO 2.5mm SQ CABLE
- 7/ CABLE ENTRIES AVAILABLE AT "T" "B" "L" "R"
- 8/ HYLOMAR PL32 SEALANT APPLIED TO ALL CERTIFIED BLANKING PLUGS
- 9/ RESET KEY PROVIDED FOR LATCHING VERSION/BATCH

- 1/ TYPE SM87PB
- 2/ CERTIFICATION NO. BASEEFA Ex85B1037 EExdIICT6 Ex84B2086 EExibiICT4
- 3/ WEIGHT 3.8±0.2 kg
- 4/ MATERIAL STAINLESS STEEL GRADE 316/ANC 4B TO BS 3146:1975

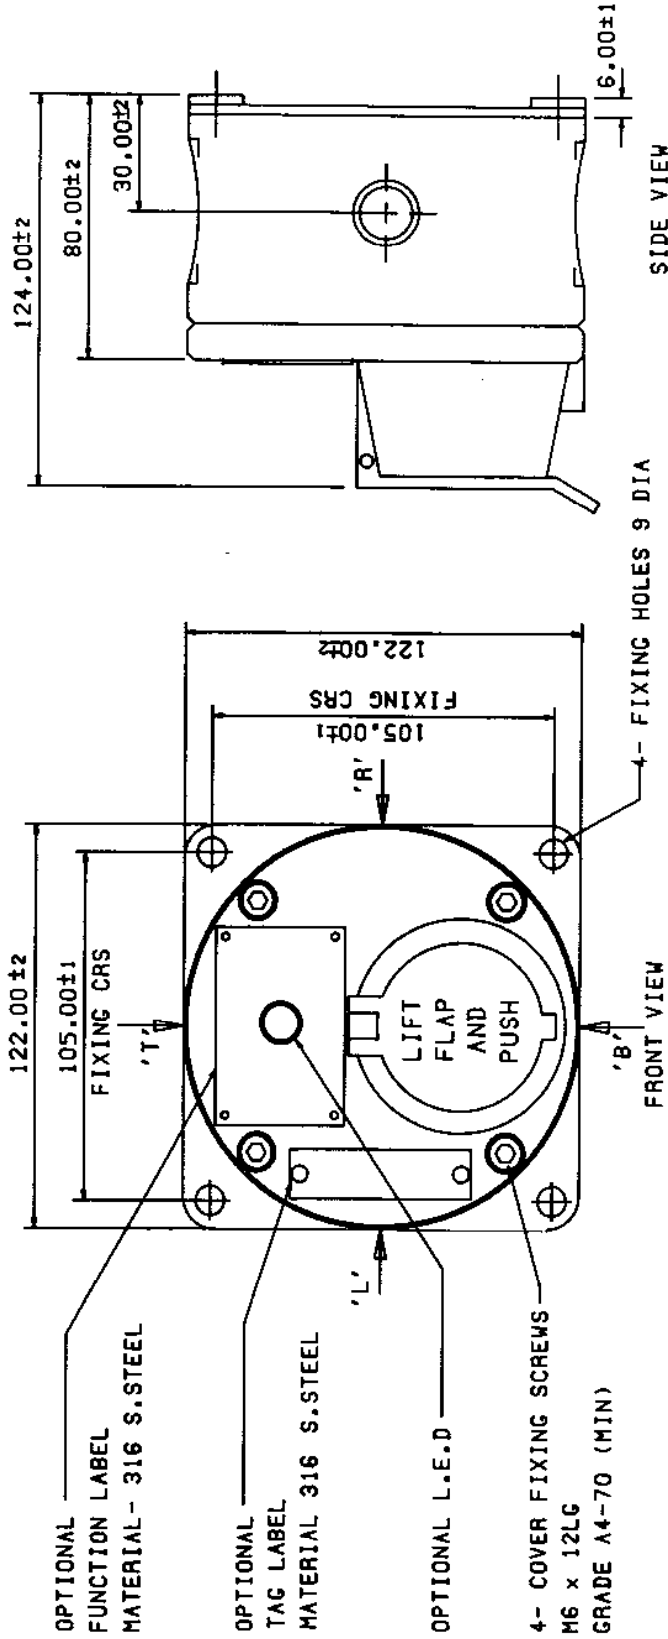

MEDC, Colliery Road, Pinxton,
Nottingham NG16 6JF, U.K.
Tel. Ripley (0773) 812249
Fax: (0773) 580282

| | | | | | | |
|---|---|---|--|------------------------------------|--|----------------------|
| ISSUES C1-12-92CF REPLOTTED | WELDING TERMS & SYMBOLS TO BS 499 PART 2 | | MACHINE SYMBOLS THUS ∇ μ m | | THIS DRAWING IS CONFIDENTIAL AND IS THE PROPERTY OF MEDC AND MUST NOT BE REPRODUCED EITHER WHOLLY OR PARTLY. ALL RIGHTS IN RESPECT OF PATENTS, DESIGNS AND COPYRIGHT ARE RESERVED. | |
| | CARBON STEEL TO BE WELDED IN ACCORDANCE WITH BS 5135 | | REMOVE ALL BURRS AND SHARP EDGES | | DRN. CF 20/192 | |
| STAINLESS STEEL TO BE WELDED IN ACCORDANCE WITH BS 3019 PT 2 - 1960 | | TOLERANCES GEN. MC OR CRS ± 0.5 ± 0.3 | | CH'D STM - W | | TITLE SM87 PB |
| WELDS TO BE FREE FROM SLAG & SPLATTER | | | | AP'D STM - W | | GENERAL ARRANGEMENT. |
| | | | | SCALE | | DRG NO S/043-01-03 |
| | | | | METRIC DIMENSIONS ONLY (U.O.S.) | | ISSUE C. |