

ENDURANCE

VALVE REGULATED LEAD-ACID BATTERIES



YUASA

A large, stylized graphic of the YUASA logo symbol, composed of several vertical white lines of varying heights, set against a green background.

Endurance VRLA Batteries


Suitable for all standby applications including Telecommunications, UPS, Emergency Lighting. Endurance range Batteries from Yuasa are the engineer's choice for even the most critical DC standby.

Features include:



- Long Life in standby (10 year design life)
- Unique mix and match parallel assembly allows extensive variations to network capacity.
- Electrolyte Suspension. A.G.M. technology assures no free electrolyte to spill or worry about
- High gas recombination efficiency. Eliminates the need for forced ventilation and separate battery rooms
- Case Material Oxygen index 30
- Fully compliant with BS6290-4 and IEC896-2

TERMINAL

8mm Stud or Female Internal Thread

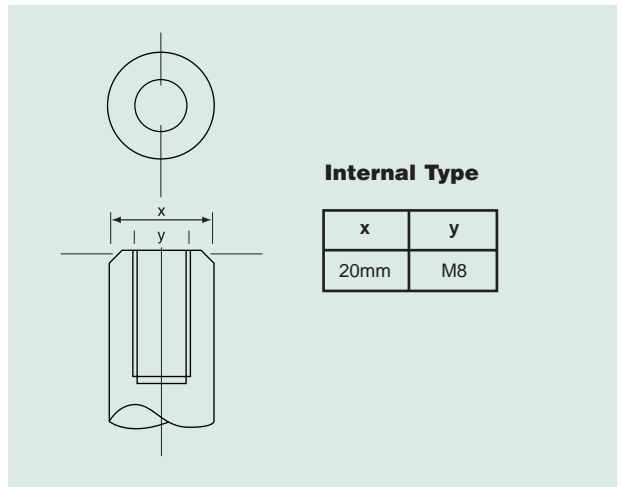

Layout

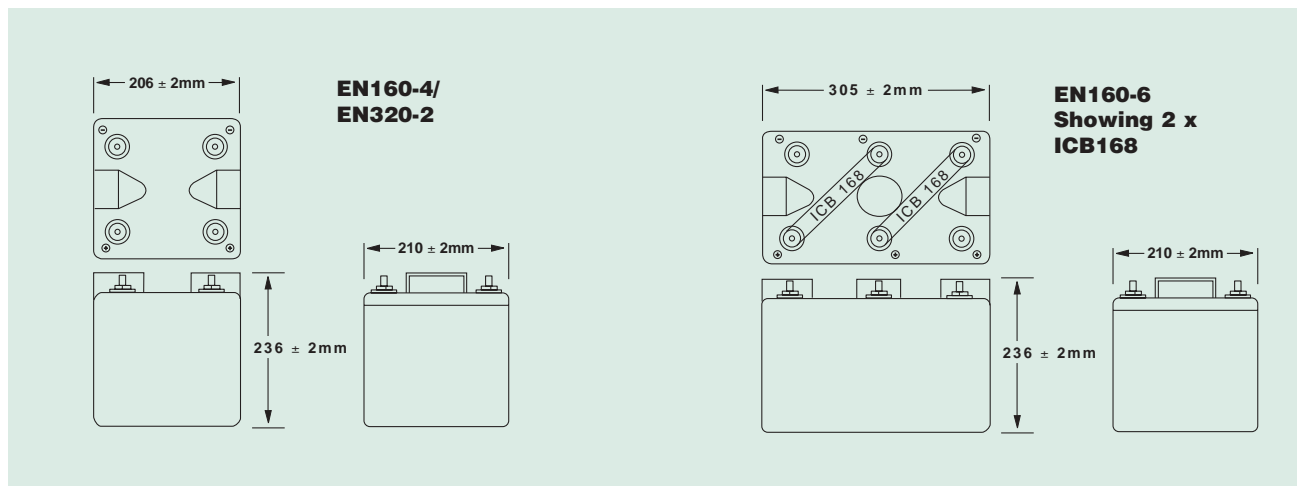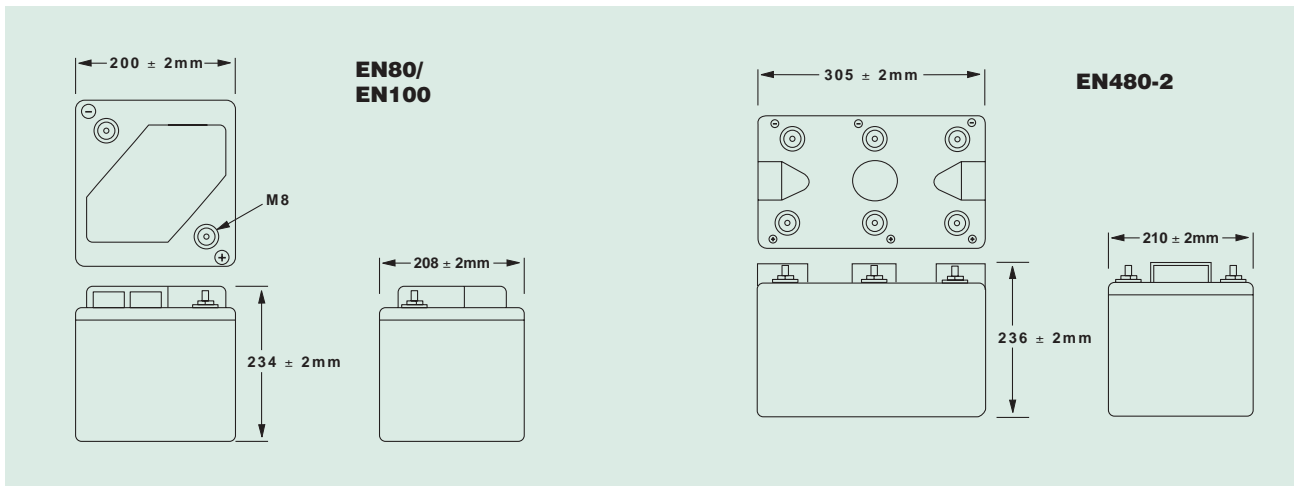

GENERAL SPECIFICATIONS

Nominal Capacity (Ah)	EN80-6	EN80-4	EN100-6	EN100-4	EN160-6	EN160-4	EN320-2	EN480-2
10hr to 1.85vpc	80	80	100	100	160	160	320	480
3hr to 1.80vpc	65	65	81	81	129	129	258	387
1 hr to 1.75vpc	53	53	66	66	105	105	210	315
Voltage	6	4	6	4	6	4	2	2
Energy Density (Wh/L)	49	33	62	41	63	63	63	63
Specific Energy (Wh. kg)	20.8	18	26	26	23	27	27	27
Int Resistance (m.ohms)	1.8	1.2	1.8	1.2	1.2	0.8	0.3	0.2
Maximum discharge (A)	480	480	600	600	960	960	1920	2880
Short Circuit current	800	800	1000	1000	1500	1500	3000	4500
Dimensions (mm)								
Length	200	200	200	200	305	206	206	206
Width	208	208	208	208	210	210	210	210
Height overall	238	238	238	238	240	240	240	240
Weight (kg)	23	17.5	23	17.5	35	24	24	35
Terminal	<	<	8mm Stud / Female Screw Thread				>	>
Layout	1	1	1	1	2	3	3a	4
Terminal Torque (Nm)	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1


CHARGING METHODS (At 20°C)

Standby use: Float charging voltage $2.26v \pm 0.005v$


CAUTION




- Avoid short circuit
- Do not charge in a sealed container

CHARGING CHARACTERISTICS

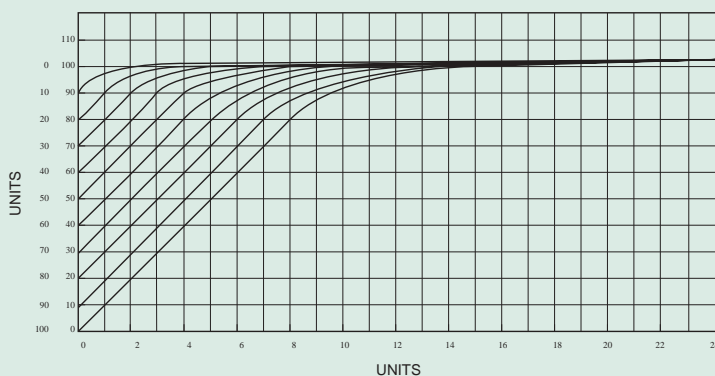

SELF DISCHARGE CHARACTERISTICS

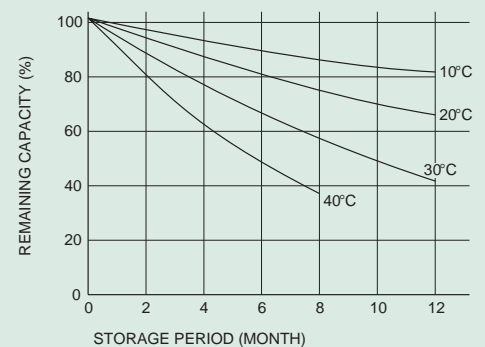

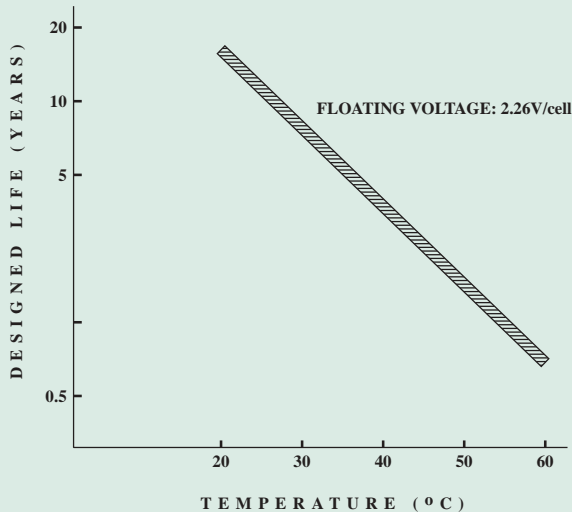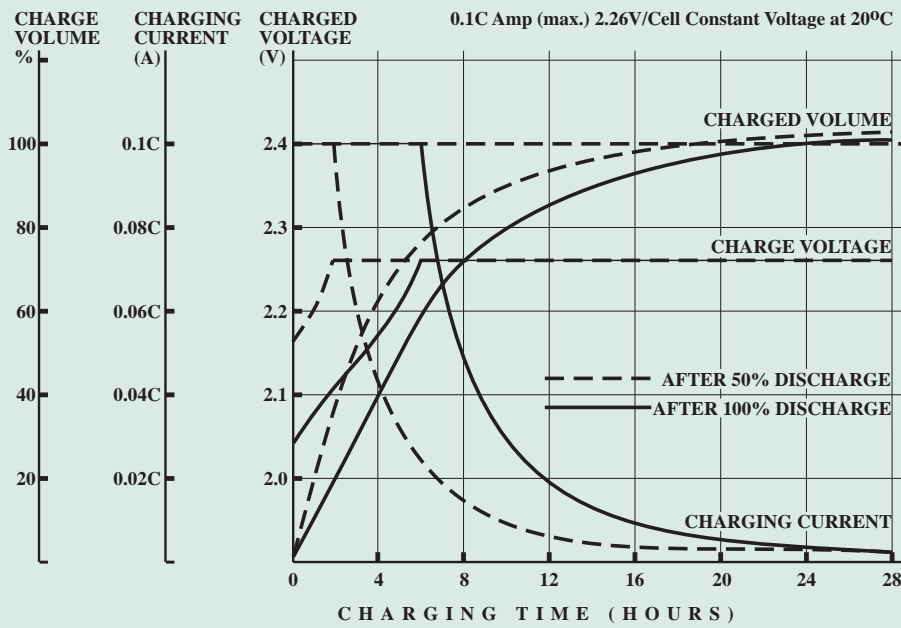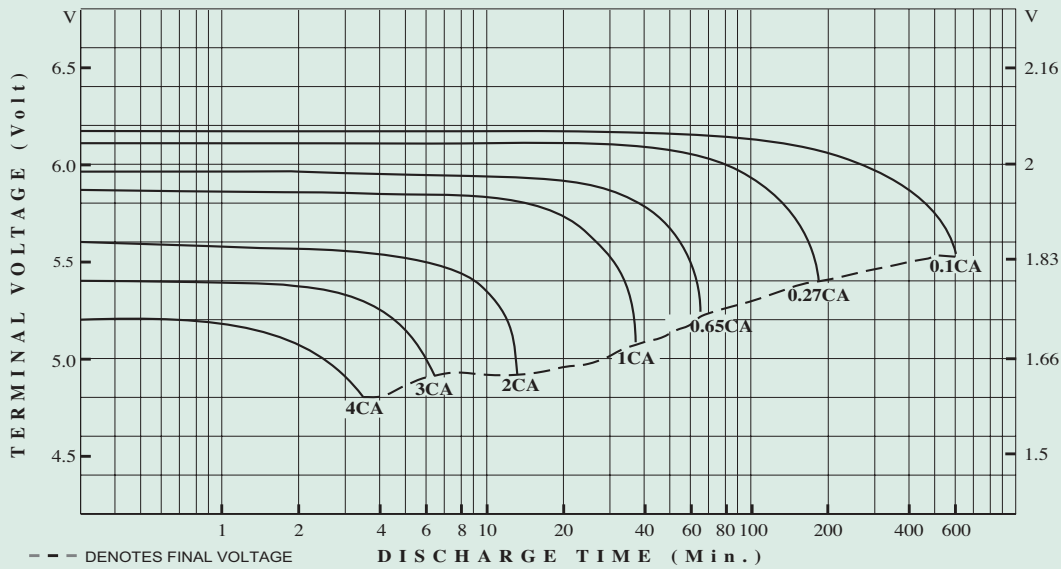

Distributed by

Yuasa Battery Sales (UK) Ltd

Unit 22 Rassau Industrial Estate
Ebbw Vale, Gwent, NP23 5SD
Tel: 08708 500312 Fax: 08708 500317
Website: www.yuasa-battery.co.uk

Registered number 1548820

Yuasa Battery (Europe) GmbH

Wanheimer Str. 47
D-40472 Düsseldorf Germany
Tel: 49 211 417900 Fax: 49 211 4179011
Website: www.yuasa-battery.net

Cat. No. EVRLASFAug05

E&O.E.