

**CARATTERISTICHE**

3 catenacci **basculanti**

Funzioni: scrocco / rullo regolabile con catenaccio, solo catenaccio, gancio

Reversibile

Frontale piatto 24 x 3 mm o ad U 23 x 6 mm **in acciaio inox** con lunghezza fissa di 1.570 mm

Il frontale fisso evita misure e tagli supplementari nell'installazione (**praticità in officina**) e occupa minore spazio (**praticità nel magazzino**)

La multipunto è installabile prima di assemblare le varie parti della porta (**praticità in officina**)


Prolunghe **in acciaio inox** (opzionali) per un **vantaggio estetico a porta ultimata**

Interasse 85 o 92 mm

Entrate 25, 30, 35 mm

Abbinabile a tutti i tipi di cilindri (opzionali):

Serie 115-116, RK6 e Spillo

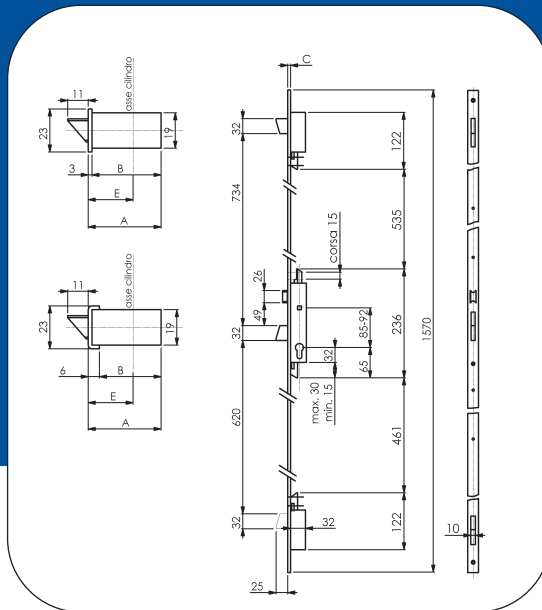**FEATURES**

3 tilting bolts

Functions: spring latch / adjustable roller latch and dead bolt, dead bolt only, hook dead bolt

Reversible

Flat forend 24 x 3 mm or U shaped forend 23 x 6 mm, **stainless steel**, lenght 1.570 mm

The fixed forend avoids cuts during the installation (**convenient in workshops**) and limits number of references (**convenient in warehouses**)

Multipoint locks can be installed before assembling the door (convenient in workshops)

The stainless steel extensions (optional) **improves the door look**

Centre distance 85 o 92 mm






Backsets 25, 30, 35 mm

Cylinders to be ordered separately:

115-116 series, RK6, Cross key

4 pz.

4 pcs.

Articolo Article	Entrata Backset E	Quote Dimensions B A		Descrizione Description	Frontale Forend	Interasse Distance
7300/1	25	34	40	Scrocco + 3 catenacci Spring latch and 3 dead bolts	23x6 mm 	85
7300/2	30	39	45			
7300/3	35	44	50			
7300C/1	25	34	40	Solo 3 catenacci 3 dead bolts only		
7300C/2	30	39	45			
7300C/3	35	44	50			
7300R/1	25	34	40	Rullo + 3 catenacci Roller latch and 3 dead bolts		
7300R/2	30	39	45			
7300R/3	35	44	50			
7304/1IN	25	37	40	Scrocco + 3 catenacci Spring latch and 3 dead bolts	24x3 mm 	85
7304/2IN	30	42	45			
7304/3IN	35	47	50			
7304C/1IN	25	37	40	Solo 3 catenacci 3 dead bolts only		
7304C/2IN	30	42	45			
7304C/3IN	35	47	50			
7304R/1IN	25	37	40	Rullo + 3 catenacci Roller latch and 3 dead bolts		
7304R/2IN	30	42	45			
7304R/3IN	35	47	50			
7323UGAN/1	25	34	40	3 ganci 3 hook dead bolts	23x6 mm 	
7323UGAN/2	30	39	45			
7323UGAN/3	35	44	50			
7092U/1	25	34	40	Scrocco + 3 catenacci. Fori DIN Spring latch and 3 dead bolts. Din Standard	23x6 mm 	92
7092U/2	30	39	45			
7092U/3	35	44	50			
7092UC/1	25	34	40	Solo 3 catenacci. Fori DIN 3 dead bolts only. Din Standard		
7092UC/2	30	39	45			
7092UC/3	35	44	50			
7092UR/1	25	34	40	Rullo + 3 catenacci. Fori DIN Roller latch and 3 dead bolts. Din Standard		
7092UR/2	30	39	45			
7092UR/3	35	44	50			
7094P/1	25	37	40	Scrocco + 3 catenacci. Fori DIN Spring latch and 3 dead bolts. Din Standard	24x3 mm 	92
7094P/2	30	42	45			
7094P/3	35	47	50			
7094PC/1	25	37	40	Solo 3 catenacci. Fori DIN 3 dead bolts only. Din Standard		
7094PC/2	30	42	45			
7094PC/3	35	47	50			
7094PR/1	25	37	40	Rullo + 3 catenacci. Fori DIN Roller latch and 3 dead bolts. Din Standard		
7094PR/2	30	42	45			
7094PR/3	35	47	50			



CARATTERISTICHE

3 catenacci **avanzanti**

Funzioni: scrocco / rullo regolabile con catenaccio, solo catenaccio

Reversibile

Frontale piatto 24 x 3 mm o ad U 23 x 6 mm **in acciaio inox** con lunghezza fissa di 1.570 mm

Il frontale fisso evita misure e tagli supplementari nell'installazione (**praticità in officina**) e occupa minore spazio (**praticità nel magazzino**)

La multipunto è installabile prima di assemblare le varie parti della porta (**praticità in officina**)


Prolunghe **in acciaio inox** (opzionali) per un **vantaggio estetico a porta ultimata**

Interasse 85 mm

Entrate 25, 30, 35 mm

Abbinabile a tutti i tipi di cilindro (opzionali):

Serie 115-116, RK6

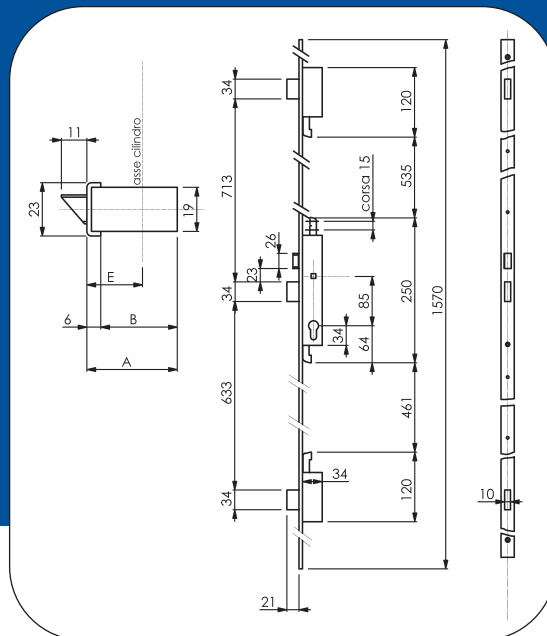

FEATURES

3 dead bolts

Functions: spring latch / adjustable roller latch and dead bolt, dead bolt only

Reversible

Flat forend 24 x 3 mm or U shaped forend 23 x 6 mm, **stainless steel**, length 1.570 mm

The fixed forend avoids cuts during the installation (**convenient in workshops**) and limits number of references (**convenient in warehouses**)

Multipoint locks can be installed before assembling the door (**convenient in workshops**)

The **stainless steel** extensions (optional) **improves the door look**



Centre distance 85 mm


Backsets 25, 30, 35 mm

Cylinders to be ordered separately: **115-116 series, RK6**

4 pz.

4 pcs.

Articolo Article	Entrata Backset E	Quote Dimensions B A		Descrizione Description	Frontale Forend
7400/1	25	34	40	Scrocco + 3 catenacci Spring latch and 3 dead bolts	23x6 mm 
7400/2	30	39	45		
7400/3	35	44	50		
7400C/1	25	34	40	Solo 3 catenacci 3 dead bolts only	
7400C/2	30	39	45		
7400C/3	35	44	50		
7400R/1	25	34	40	Rullo + 3 catenacci Roller latch and 3 dead bolts	
7400R/2	30	39	45		
7400R/3	35	44	50		
7404/1IN	25	37	40	Scrocco + 3 catenacci Spring latch and 3 dead bolts	24x3 mm 
7404/2IN	30	42	45		
7404/3IN	35	47	50		
7404C/1IN	25	37	40	Solo 3 catenacci 3 dead bolts only	
7404C/2IN	30	42	45		
7404C/3IN	35	47	50		
7404R/1IN	25	37	40	Rullo + 3 catenacci Roller latch and 3 dead bolts	
7404R/2IN	30	42	45		
7404R/3IN	35	47	50		


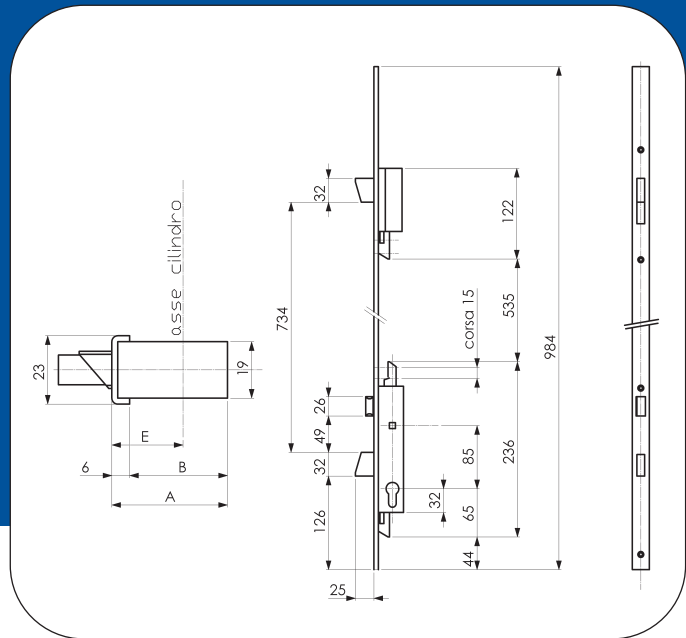


CARATTERISTICHE

2 catenacci **basculanti**
 Funzioni: scrocco con catenaccio, solo catenaccio, gancio
 Reversibile
 Frontale ad U 23 x 6 mm **in acciaio inox** con lunghezza fissa di 984 mm
 Interasse 85 mm
 Entrate 25, 30, 35 mm
 Abbinabile a tutti i tipi di cilindri (opzionali): **Serie 115-116-117, RK6 e Spillo**

FEATURES



2 *tilting* dead bolts
 Functions: *spring latch and dead bolt, dead bolt only, hook dead bolt*
 Reversible
 Forend U shaped 23 x 6 mm, **stainless steel**, length 984 mm
 Centre distance 85 mm
 Backsets 25, 30, 35 mm
 Cylinders to be ordered separately: **115-116-117 series, RK6, Cross key**



Articolo Article	Entrata Backset E	Quote Dimensions B A		Descrizione Description
7322U/1	25	34	40	Scrocco + 2 catenacci Spring latch and 2 dead bolts
7322U/2	30	39	45	
7322U/3	35	44	50	
7322UC/1	25	34	40	Solo 2 catenacci 2 dead bolts only
7322UC/2	30	39	45	
7322UC/3	35	44	50	
7322UGAN/1	25	34	40	2 ganci 2 hook dead bolts
7322UGAN/2	30	39	45	
7322UGAN/3	35	44	50	

ACCESSORI ACCESSOIRES

Prolunga per multipunto
Extension for multipoint locks

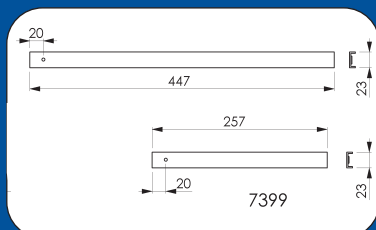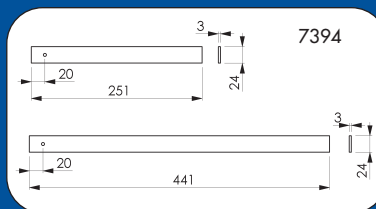

CARATTERISTICHE

Prolungha in **acciaio inox** per abbellire la porta
Parte inferiore fissa (maniglia a 1050 mm da terra). Parte superiore rasabile **per porte alte fino a 2.300 mm**
Serve **solo un taglio** per adattarsi all'altezza della porta
Giunti e terminali di finitura in nylon

FEATURES

The **stainless steel** extensions **improves the door look**
The bottom side is fixed (**distance handle/floor 1050 mm**). The top side can be trimmed off **for doors up to 2300 mm**
A cut only is needed to fit the door height
Nylon joints and finishing terminals



ACCESSORI ACCESSOIRES

La gamma
Range

Articolo Article	Frontale Forend	Descrizione Description
7399/U	23x6 mm 	Prolunga Extension
7394/P	24x3 mm 