

DC630G Technical Datasheet

ASSA ABLOY Opening Solutions

Vertical gate closer with 3D Cam-Motion[®] technology for easy gate opening with minimal user effort

Experience a safer and more open world

Vertical gate closer with 3D Cam-Motion[®] technology and guide rail – for single action gates, adjustable size



DC630G, silver, EV1

Cam-Motion[®] technology creates rapidly decreasing opening force while closing tightly With its minimalist and slim design, the DC630G is mounted vertically behind your gate. Unique 3D Cam-Motion technology allows easy opening with minimal user effort. It ensures comfortable operation and barrier-free access whilst maintaining a closing force to ensure secure closing.

- Suitable for non-paneled garden and pedestrian gates with or without protruding bars
- For single action gates up to 1300 mm width, adjustable size
- Barrier-free according to CEN/TR 15894
- · Supplied with guide rail, mounting screws and rivets

Colours

- Silver, EV1
- Matt Black, similar to RAL 9004
- Customized colours on request

Features

- Can be used in four installation types: pillar or wall mounting on push and pull side of the gate
- Easy to install no welding required
- Closing and latch speeds can be raised and lowered independently
- Adjustable power sizes simplify specification
- Durable, side-facing metal valves make adjustments easy and reliable
- Consistent performance in a wide range of temperatures
- · Pinch free guide rail adds safety


Product variants

- DC630G-R right-handed gate closer
- · DC630G-L left-handed gate closer

Accessories

- AC632 mounting plates for rack and protruding bars guide rail installation
- AC633 mounting bracket kit for wall and push side body installation
- A152 mechanical hold-open device with adjustable hold-open force, keeps gates open at an angle between 80° and 130°
- A153 mechanical opening damper, continuously adjustable up to an opening angle of max. 130°

Four mounting options with one product



Pillar mounting on pull side, standard



Pillar mounting on pull side, upside down




Wall mounting on push side, standard



Wall mounting on push side, upside down

Technical attributes and certification

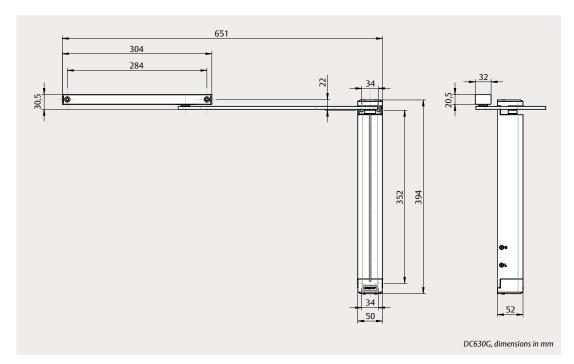



Technical attributes	
Maximum gate weight	150 kg
Maximum gate width	1300 mm
Closing speed (C)	Variable between 130° and 20°
Latch speed (L)	Variable between 20° and 0°
Maximum opening angle*	~130°
Gate system	Single action, with or without protruding bars
Handing	Left- / right-handed
Mounting options	Pillar or wall mounting Pull or push side
Force adjustment	Yes
Pretension adjustment	Yes
Corrosion resistance	Yes
Dimensions (H x D x L)	50 x 52 x 394 mm

Visit assaabloy.com to download all relevant product literature


*Gate construction / hinges may limit the maximum opening angle



 Certification and testing
 Earrier-free according to
 CEN/TR 15894

 Third-party verified EPD
 ISO 14025, EN 15804

Independent adjustment via side-facing valves







Latch speed (L)

Min.

Space requirement and mounting dimensions

33 Min. 53 Max.

262

8 Min.

2

352



Scan the QR code to watch the installation video

Pillar mounting on pull side

The drawing illustrates installation on right-handed gates with DC630G-R. For installation on left-handed gates with DC630G-L, it is the reverse.

Pillar mounting

on push side; with AC633 mounting bracket


The drawing illustrates installation on left-handed gates with DC630G-R. For installation on righthanded gates with DC630G-L, it is the reverse.

Reverse pillar mounting on pull side


The drawing illustrates installation on right-handed gates with DC630G-L. For installation on left-handed gates with DC630G-R, it is the reverse.

Reverse pillar mounting on push side; with AC633 mounting bracket


The drawing illustrates installation on left-handed gates with DC630G-R. For installation on righthanded gates with DC630G-L, it is the reverse.

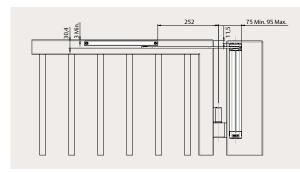



284





Space required on gates for standard installation on pillar (pull side)




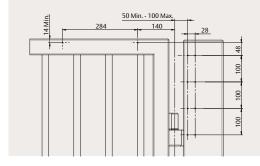


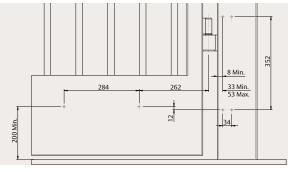










Space requirement, mounting dimensions and accessories

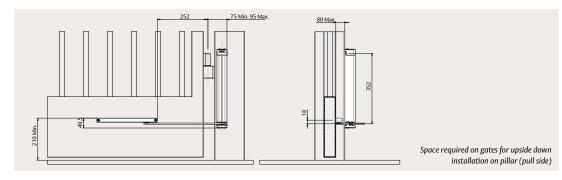

Wall mounting

on push side

The drawing illustrates installation on left-handed gates with DC630G-L. For installation on righthanded gates with DC630G-R, it is the reverse.

Wall mounting

on pull side; with AC633 mounting bracket

The drawing illustrates installation on right-handed gates with DC630G-L. For installation on left-handed gates with DC630G-R, it is the reverse.

Reverse wall mounting on push side

The drawing illustrates installation on right-handed gates with DC630G-R. For installation on left-handed gates with DC630G-L, it is the reverse.


200 Min.


137


30 Min. - 60 Max.


Accessories


AC632 mounting plate and AC633 mounting bracket

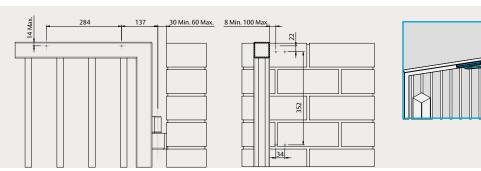

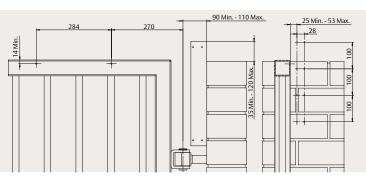





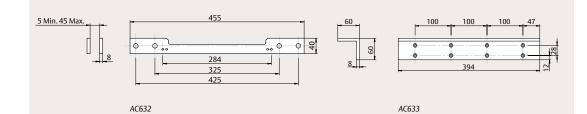

8 Min. - 100 Max.

Order information

Mechanical hold-open device A152

Mechanical opening damper A153



Gate closers	
DC630G-L, left-handed, silver, EV1	DC630G-LEV1-
DC630G-R, right-handed, silver, EV1	DC630G-REV1-
DC630G-L, left-handed, black, similar to RAL 9004	DC630G-L9004
DC630G-R, right-handed, black, similar to RAL 9004	DC630G-R9004
Accessories	
Mounting plate AC632 for guide rail, silver, EV1	DCAC632EV1-
Mounting plate AC632 for guide rail, black, similar to RAL 9004	DCAC6329004
Mounting bracket kit AC633 for body, silver, EV1	DCAC633EV1-
Mounting bracket kit AC633 for body, black, similar to RAL 9004	DCAC6339004

DCA152-----

DCA153-----



The ASSA ABLOY Group is the global leader in access solutions. Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, door and window hardware, locks, access control and service.



ASSA ABLOY Opening Solutions EMEIA Dukes Court Dukes Street Woking GU21 5BH United Kingdom assaabloy.com