


Industrial Power Supply

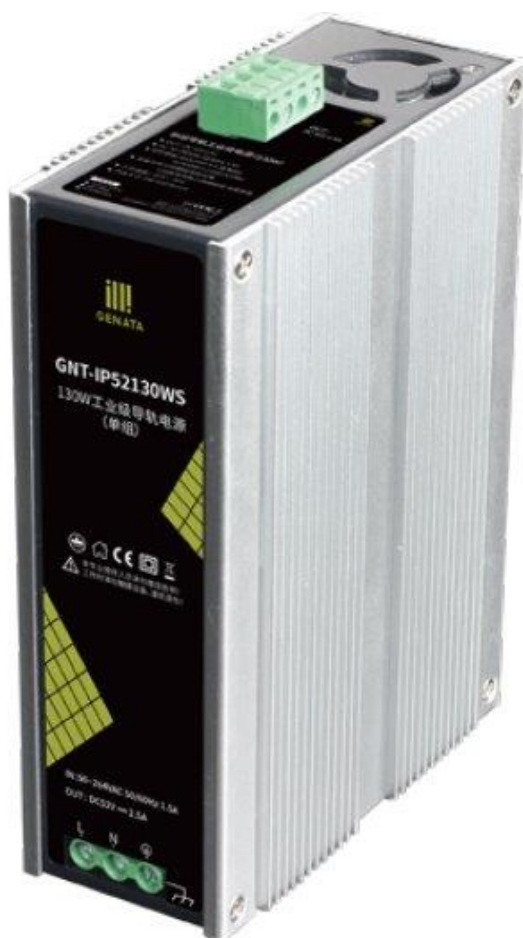

GNT-IP52130WS

IP40 Protection
 Single-Output 2 ports SFP
 Total 130W Power Supply

Product Features


Aluminum shell for better heat dissipation, stable and durable
 For extreme temperature environments: -40°C~70°C
 Standard DIN-Rail mounting, fast in installation

Specifications

Power Output	DC 52V 2.5A(Single-Output)
Power	130W
Ripple & Noise	Peak ≤1% (Typical 200mVp-p)
Time of Start-up & Rise	600ms, 20ms
Hold Time	60ms/12ms(Full Load)
Power Input	90~264VAC 50/60Hz
Input Current (Max)	1.5A
Average Output Efficiency	89%
Hipot Test	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC
Insulation Resistance Test	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70%RH
Circuit Protection	Support
Over Current Protection	Support
Over Temperature Protection	Support
Protection Level	Protection Level: IP40, Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(H*D*W): 145*110*51mm, Weight: 0.62KG/Pcs
Package	Size(L*W*H): 400*360*300 mm (CTN Box); 24Pcs/CTN
Working Environment	Operating Temperature: -40°C~70°C Storage Temperature: -40°C~70°C Relative Humidity: 10%~90% Non-condensing Heat dissipation mode: Fan design
Certification	CE Mark FCC Part15, Class B RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	User Manual

Installation Diagram

Standard DIN-rail mounting

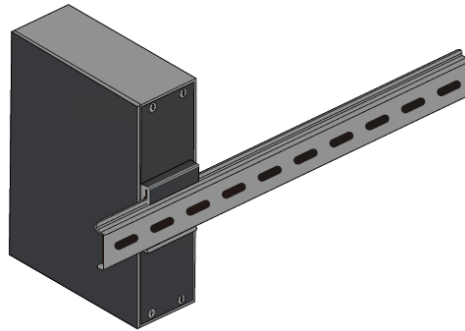

Dimension (mm)

