

# ***AVI321 / 311***

## ***Network Camera Series***

### ***Quick Guide***



All lead-free products offered by the company comply with the requirements of the European law on the Restriction of Hazardous Substances (RoHS) directive, which means our manufacture processes and products are strictly "lead-free" and without the hazardous substances cited in the directive.



The crossed-out wheeled bin mark symbolizes that within the European Union the product must be collected separately at the product end-of-life. This applies to your product and any peripherals marked with this symbol. Do not dispose of these products as unsorted municipal waste. Contact your local dealer for procedures for recycling this equipment.

Please read instructions thoroughly before operation and retain it for future reference.

# 1. PRODUCT OVERVIEW

## 1.1 Description

This PTZ network camera series is a high-performance device for use in professional and demanding surveillance situation. It supports multiple network protocols for MPEG4 or MJPEG live video transmission, and you can easily view, record and operate the camera via the supplied video viewer software or the web browser. Video surveillance over IP network infrastructure is available and easy from anywhere, at anytime.









## 1.2 Features






- Built-in 22x / 3x optical zoom lens with auto focus lens
- Intelligent auto tracking function to follow intruders (AVI321 only)
- Area Zoom functions – Draw a square in the live view with your mouse and the PTZ network camera will zoom in the assigned area.
- Motion detection and alarm notification functions
- Real time MPEG-4 network transmission
- Low-latency video streaming for sharp and clear images
- Hybrid digital / analog video output
- Control network camera via Central Management System (CMS) software
- Excellent precision controllability using joystick or keyboard controller
- Support external microphone input
- Complete IP surveillance system, such as the Central Management System (CMS) software, Network-Attached Storage (NAS), Network Video Recorder (NVR), etc.

### 1.3 Package Contents

- AVI321

☉ In the camera package:	☉ In the bracket package (Optional) :
<input type="checkbox"/> 22X PTZ network camera <input type="checkbox"/> CD-ROM disc for user manual <input type="checkbox"/> CD-ROM disc for Video Viewer AP Software	<input type="checkbox"/> Bracket <input type="checkbox"/> Wall mounting screw * 4  <input type="checkbox"/> Wall plug * 4  <input type="checkbox"/> Cap * 1  <input type="checkbox"/> M6 Nylok screw * 6  <input type="checkbox"/> Spirit level * 1  <input type="checkbox"/> M4 screw * 1 

- AVI311

<input type="checkbox"/> 3X PTZ network camera	<input type="checkbox"/> Screw * 3 
<input type="checkbox"/> CD-ROM disc for user manual	<input type="checkbox"/> Wall Plug * 3 
<input type="checkbox"/> CD-ROM disc for Video Viewer AP Software	<input type="checkbox"/> Decoration Cover * 3 

**Note: The DC12V 1A adapter, power cord and RJ45 network cable are not included with the sales package. Please prepare by yourself.**

## 1.4 Specifications


SPECIFICATIONS*	AVI321	AVI311
<b>■ Network</b>		
LAN Port	YES	
LAN Speed	10/100 Based-T Ethernet	
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP	
Frame Rate	NTSC:30, PAL:25	
Number of Online Users	10	
Security	Multiple user access levels with password	
Web management software	YES (Control up to 16 network cameras simultaneously)	
<b>■ Video / Audio</b>		
Video Compression	MPEG4 / MJPEG	
Video Remote Control	YES	
Video Adjustment	Brightness, Contrast, Saturation and Hue	
Audio Compression	uLaw , 128kbps	
Audio Input	External Microphone Input	
<b>■ Camera</b>		
Image Sensor	1/4" Sony Color Super HAD CCD	1/3" Sony Color Super HAD CCD
Pixels	768(H)*494(V)<NTSC> / 752(H)*582(V)<PAL>	
Resolutions	480 TVL	
Lens	f3.9 ~ 85.9mm	f4.2 ~ 12.7mm
F-number	F1.6 (Wide) ~ 3.7 (Tele)	F2.6 (Wide) ~ 4.3 (Tele)
Viewing Angle	4° ~ 80°	26.7° ~ 80°
Pan Range	360°	
Tilt Range	90°	
Zoom	22X Optical Zoom (f3.9 ~ 85.9mm)	3X Optical Zoom (f4.2 ~ 12.7mm)
Max Speed	Pan 360°/s, Tilt 90°/s	Pan 27°/s, Tilt 18°/s
Shutter Speed	1 / 60 (1/50) to 1 / 100,000 sec.	
Min Illumination	1 Lux / F1.6	1.5 Lux / F2.6
Video Output	1.0 Vp-p, 75Ω	
BLC	On / Off	
White Balance	ATW	
Camera ID	0~255	
<b>■ Others</b>		
Remote Control	YES	
Motion Detection	YES	
Alarm and event Notification	Image upload over FTP and Email	
General I/O	Alarm in x1	
Power	12VDC, 1A	
Operating Temperature	0~40°C	
Humidity	85%	
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> <li>• Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD</li> <li>• 256 MB RAM</li> <li>• AGP graphics card , Direct Draw, 32MB RAM</li> <li>• Windows XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later</li> <li>• Internet Exploerer 6.x or later</li> </ul>	
Dimension (L x W x H)	145(D) x 184(H) mm	134(D) x 122(H)
Shipping Weight	NA	NA
Indoor / Outdoor Application	Outdoor	Indoor

\* The specifications are subject to change without notice.

## 2. CONNECTOR OVERVIEW

### 2.1 CONNECTOR OVERVIEW

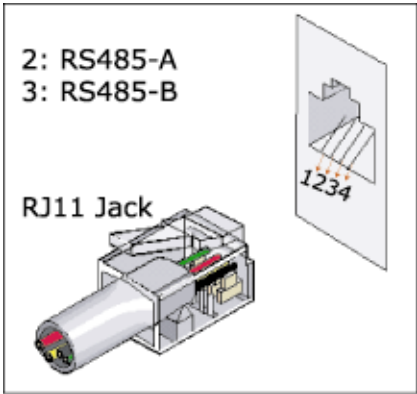

CONNECTOR	DESCRIPTION
Power Connector	Connect the DC 12V adapter for power supply.
Video Output Connector	Connect to the video input connector of your monitor with a video cable (i.e. a RCA line with the BNC connector, or a coaxial line) for video output. * The video cable is not included with the sales package.
Audio Input Connector	Support the connection to an audio device, such as a microphone, for voice transmission of the local side.
RJ11 Connector 	Get a RJ11 line with the proper length to your connection. Different RJ11 line may have different line layout, so the connection might be different. If you cannot control the PTZ network camera after connection, please reverse the RJ11 line layout and try again.
RJ45 Jack Connector	Get a R45 network cable with the proper length to your connection. And connect the network camera to the network.

## 3. INSTALLATION

### 3.1 Install the Hardware (For AVI321)

Before installation, you need the following items before installation:

- Bracket (supplied with the bracket sales package)
- The accessory packages supplied with the bracket sales package, including:
  - (1) Wall mounting screws
  - (2) Wall plugs
  - (3) Cap
  - (4) M6 Nylok screws
  - (5) Spirit level
  - (6) M4 screw
- Power Drill

#### STEP 1: Attach the camera-mounting base to the PTZ camera.


Put the all the camera connectors through the hole of the camera-mounting base. Align the breach of the camera-mounting base to the sticker label on the camera, and use two **M6 Nylok screws** to attach the camera-mounting base to the camera, as shown in the picture below.



#### STEP 2: Attach the bracket to the wall.

The bracket is composed of two parts: the upper part and the bottom part. Remove the upper part from the bottom part of the bracket. Use the four mounting screws and wall plugs to attach the bottom bracket to the wall, as shown in the picture below.

Use the spirit level supplied with the bracket package to check the surface is horizontal or not. **If the surface is horizontal, the bubble will remain in the center circle of the spirit level.**

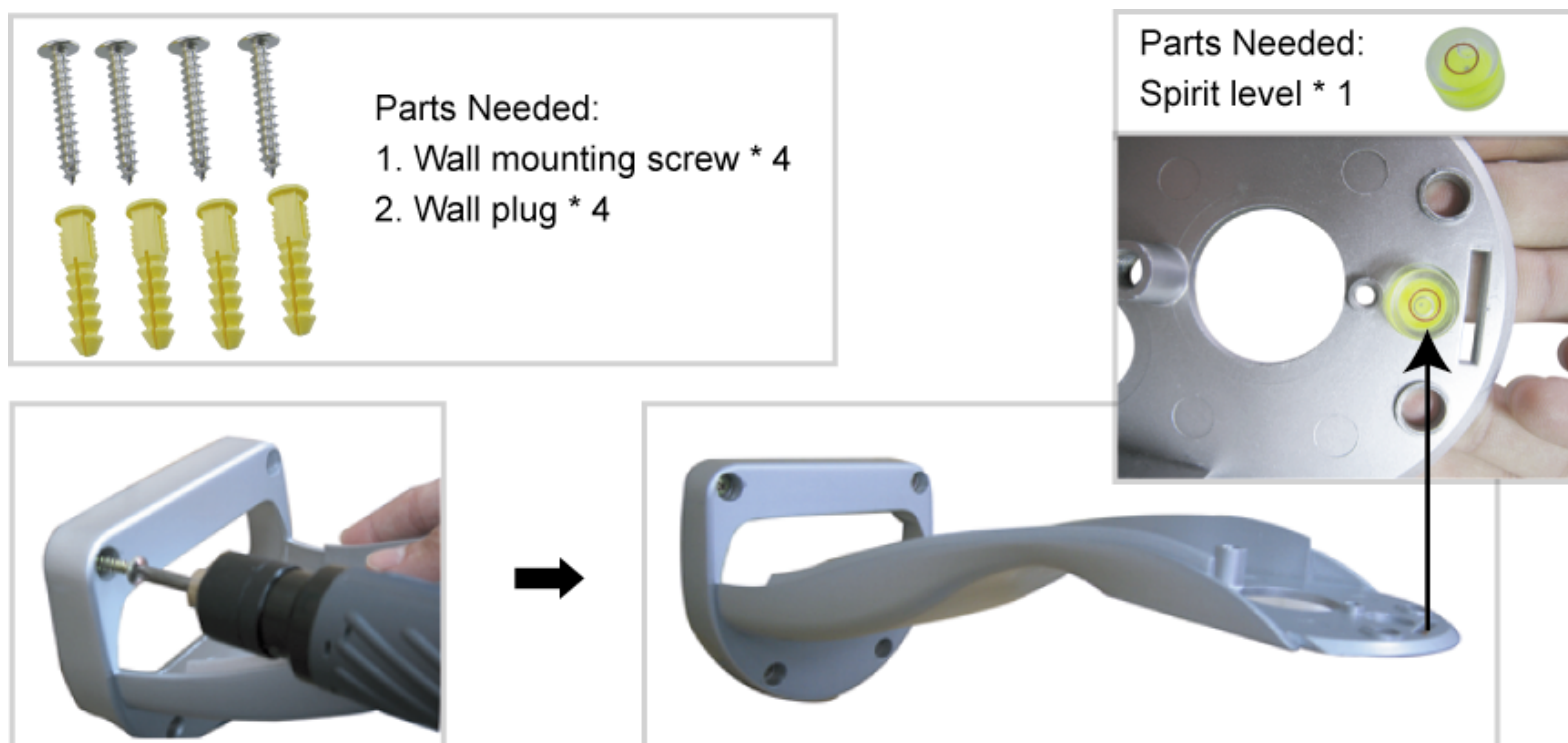

**STEP 3: Attach the PTZ network camera to the bracket.**

Turn the camera up side down, and put the power, video and RS485 data connectors through the hole of the bracket. Then, slightly secure the camera and the bracket with three M6 Nylok screws.




**STEP 4: Check the surface is horizontal or not.**

Use the **spirit level** to check the surface is horizontal or not, and adjust the tightness of the **M6 Nylok screws**. When you make sure the surface is horizontal, use the **M4 screw** to fix the camera and the bracket tightly.




**STEP 5: Connect the power, video, audio, RJ11, RJ45 connectors.**

Arrange the cables in the proper position. Put the cables through the slot and connect the camera with the indicated power adapter, video cable, audio cable, RJ11 cable and RJ45 cable. After connection, use the insulation tape to cover the connected wires and arrange the cables in the proper position again.

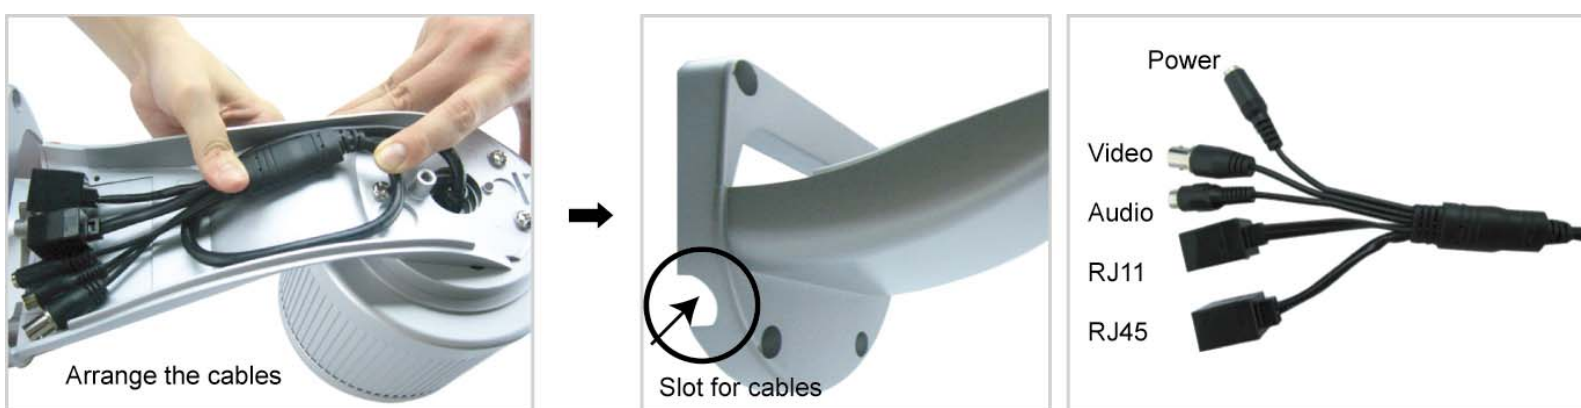

**STEP 4: Replace the upper part of the bracket and finish the installation.**

Replace the upper part of the bracket and fasten the bracket with a **M6 Nylok screw**. Then use the **cap** supplied with the package to cover it and finish the installation.

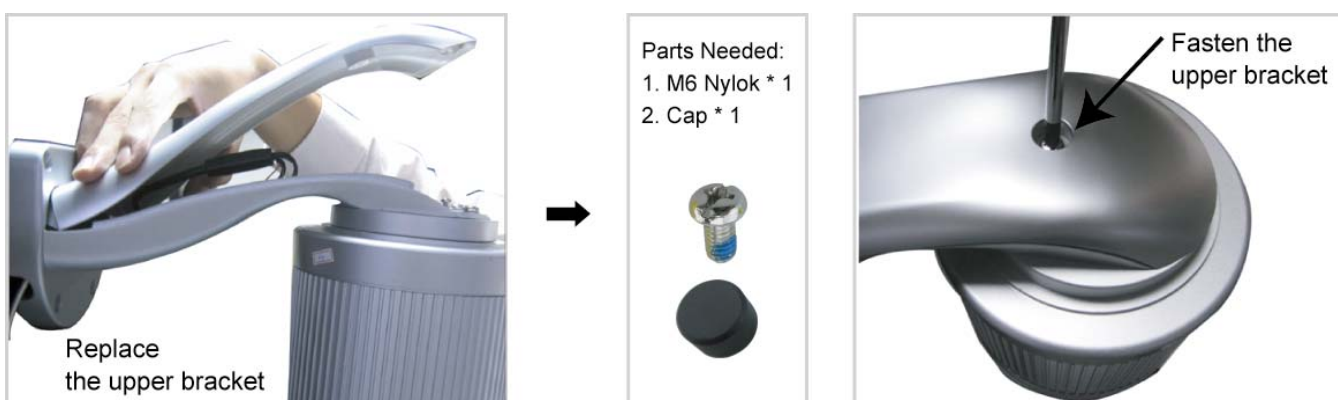

## 3.2 Install the Hardware (For AVI311)

Before installation, you need the following items before installation:

- The accessory package which includes:
  - (1) Wall mounting screws
  - (2) Wall plugs
  - (3) Decoration covers
- Power Drill or screwdriver

### STEP 1: Mount the camera to the ceiling.

Attach the camera to the ceiling, and fasten the camera with the supplied 3 screws.



### STEP 2: Push the decoration covers to the camera to lock.

When the camera is mounted, find the supplied 3 decoration covers in the accessory package, and push them to the camera to lock as shown below.



### STEP 3: Connect the power, video, audio, RJ11, RJ45 connectors.

Please refer to Step 5 in “3.1 Install the Hardware (For AVI321)”.










### 3.3 Assign an IP address and Access the Camera

#### Step 1. Install the Software

Place the supplied Video Viewer AP software CD into your DVD- / CD-ROM drive. The installation process will automatically start. Follow the on-screen instructions to install the application programs. After installation, a “Video Viewer” shortcut icon will be shown on your PC desktop.

#### Step 2. Connect the network camera to the Internet access via a RJ-45 network cable.

#### Step 3. Search the available IP address to login

- Double-click  icon on your PC desktop to enter the Video Viewer control panel. By defaults, the “Address Book” () panel will be displayed on the right side of the Video Viewer control panel.
- Click  (Search) →  (Refresh) to search the available IP address(es). The found address(es) will be listed, and can be added into the address book by clicking  (Add into address book).  
For details, please see  (Search) at page 11.
- Select the IP address you just added into the address book, and click  (Edit) to edit the settings.
- Double-click the IP address in the address book to login.


---



**Note:** For detailed network settings under different network types (Static IP / PPPOE / DHCP), please refer to “錯誤! 找不到參照來源。” at page 錯誤! 尙未定義書籤。 and “錯誤! 找不到參照來源。” at page 錯誤! 尙未定義書籤。 .

---

- If you cannot search any available IP address, please follow the instructions below.

#### Step 4. Add the IP address and other network settings to login

- Double-click  icon on your PC desktop to enter the Video Viewer control panel. By defaults, the “Address Book” panel will be displayed on the right side of the Video Viewer control panel.
- The default network camera settings are as follows:
 


Item	Default Setting
IP Address	192.168.1.10
User Name	admin
Password	admin
Port Number	80
- Click  (Address Book) →  (Add) button to key in the IP address, user name, password, and port number of the network camera you intend to connect.


Item	Default Setting
IP Address	192.168.1.10
User Name	admin
Password	admin
Port Number	80









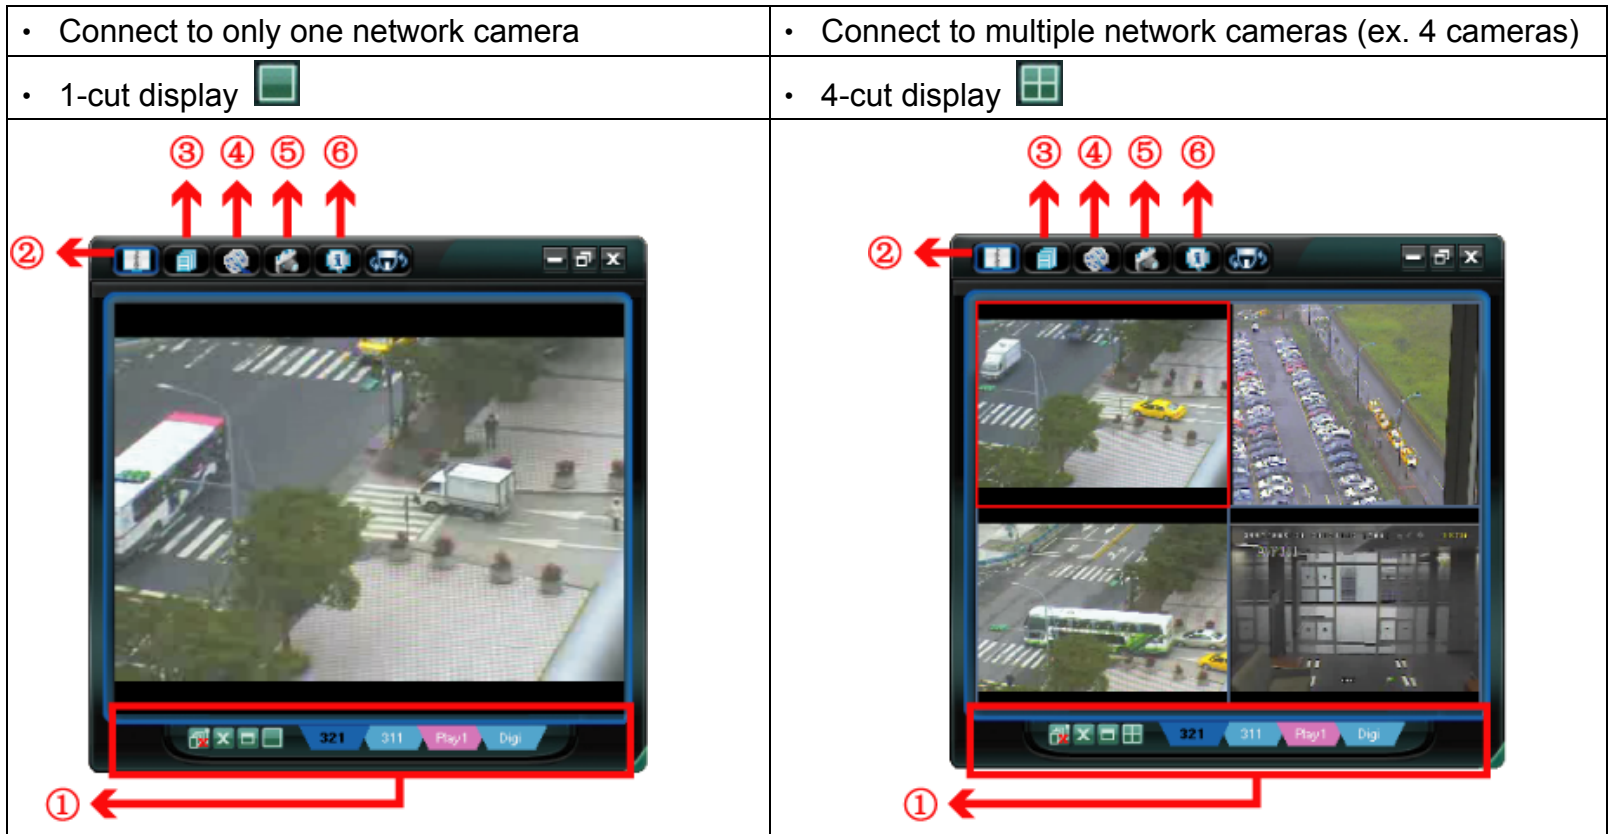


- Double-click the IP address you just added into the address book to login.

## 4. VIDEO VIEWER BASIC OPERATION

### 4.1 The Live View Page


After setting up the network information, login user name and password, double-click “” on the PC desktop to open and log into the Video Viewer control panel. You will see a screen similar to the following with 6 major sections:



NO.	Button	Function	Description
①		Image Display	To switch to another camera view if two or more network cameras are connected, click the corresponding blue tab. The camera title shown in the blue tab can be customized (For example, “321”, “311”, “Play1” and “Digi”). The default camera title is “Camera1”.
		Scale	Click to view the images in the full screen, 4-cut, 9-cut and 16-cut mode.
		Full Screen	Click to view the images in the full screen mode. To exit the full screen mode, press “Esc” key on the keyboard of the PC.
		Close	Click to close the current image display view. If the image display view is closed, you will be logged out automatically.
		Close All	Click to close all the current image display view. If the image display view is closed, you will be logged out automatically.
②		Address Book	Click to show the predefined IP address(es). You can add, remove or search the IP address to login the network camera remotely.
③		Miscellaneous Control	Click to show the main operation functions: audio volume control, color setting, backup, record setting, server setting, upgrade, and find status log list.
④		Record	Click to start / stop the manual recording.
⑤		Snapshot	Click to take a snapshot of the current view. The snapshot will be saved in the path you specified in Record Setting.
⑥		Information	Click to show the current network connection details.
⑦		PTZ	Click to show the PTZ control functions: auto tracking, auto move, auto pan, zoom in, zoom out, focus near and focus far ...etc.

## 4.2 Address Book

This view is displayed when the Video Viewer is activated for you to login / out the network camera from the current address list, or search the available IP address as follows:

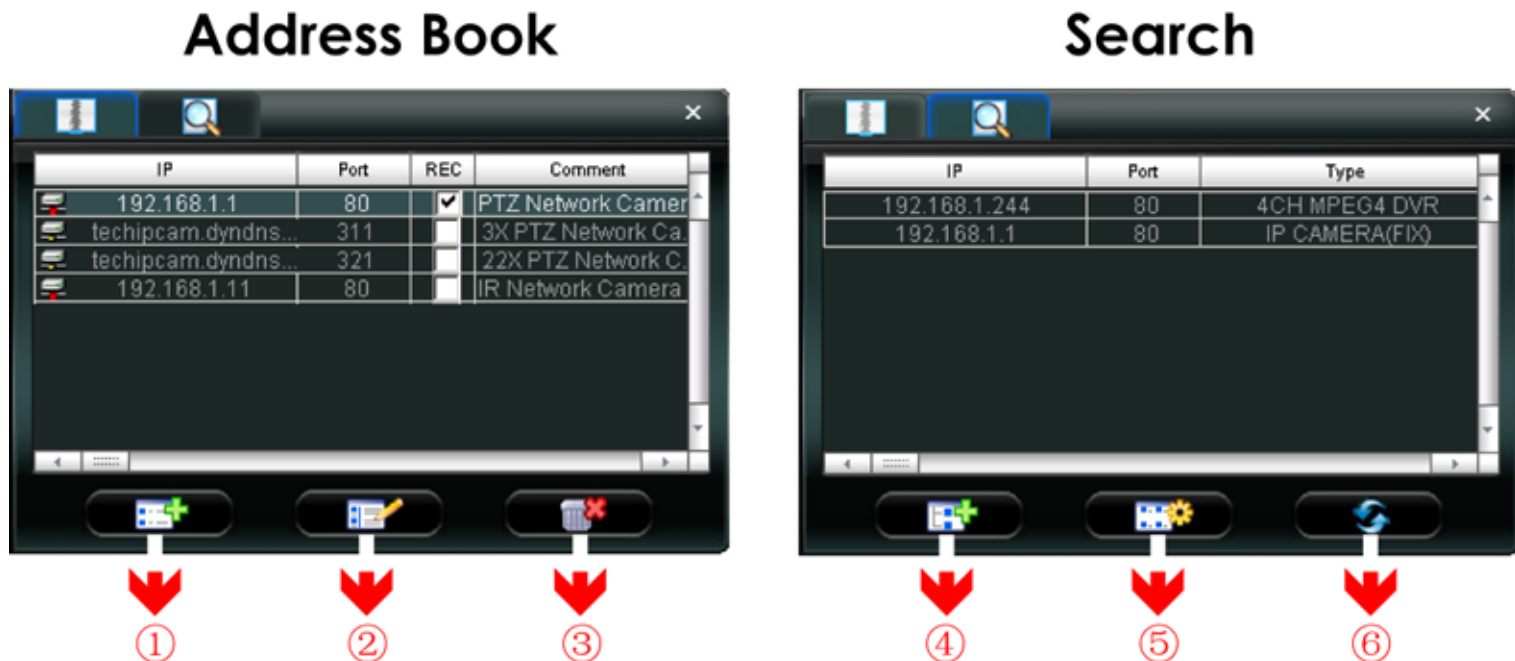
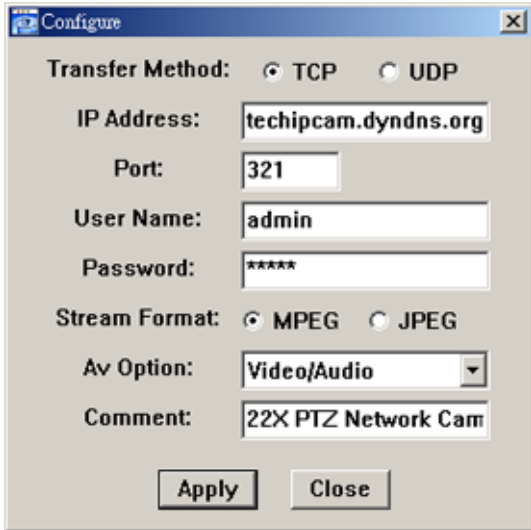




### (Address Book)

Click to view the pre-defined network camera access details.




To login, choose one IP address from the address list, and click the address twice; to logout, click the connected IP address twice.

You can also create new IP address information, or modify or remove the current IP address information.

NO.	Button	Function	Description
1		Add	Click to directly add one IP address for login. Key in all the network camera access information needed, and click "Apply" and "Close" to add the selected address to the address book. 
2		Edit	Select one current IP address from the address list, and click this button to edit the settings.
3		Remove	Select one IP address from the address list, and click this button to delete it.
4	<input checked="" type="checkbox"/>	Record	Check this checkbox to enable the record settings. For details, please refer to your user manual. The default setting is unchecked.



➤  **(Search IP Address)**


Click to search and view the available IP address(es) for the network connection. You can choose one address to add into the address book, edit the details, or update the address list.

NO.	Button	Function	Description
4		Add into address book	Select from the available IP address list, and click this button. Key in the network camera access information needed, and click “Apply” and “Close” to add the selected address to the address book.
5		Setting	Select from the available IP address list, and click this button to edit the setting.
6		Refresh	Click to update the available IP address list.


### 4.3 Manual Record


1) Choose the record type and assign the record location

Click “” (Miscellaneous Control) → “” (Record Setting) to go to the “Record Setting” page. Check the record type(s) (Manual), and assign the location to save the recordings by double-clicking the “Video Path” cell.

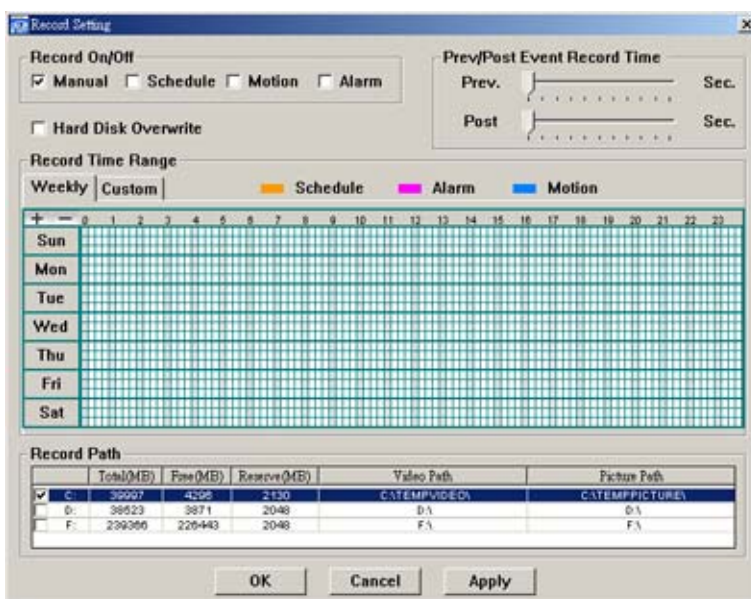


2) Enable the record settings

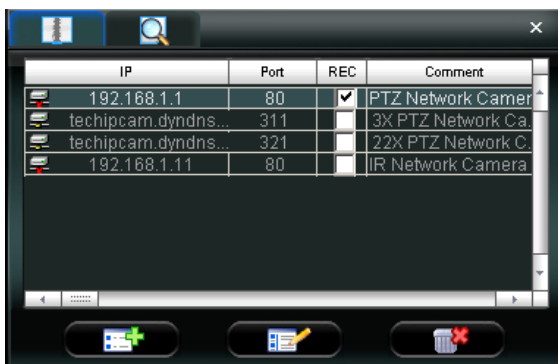

Once the “Manual” checkbox is checked in the “Record On/Off” section, checked the “REC” box in the address book panel “” to enable the record settings.




3) Click “” (Record) button to start manual recording

Click “” (Record) on the main control panel to start the manual recording immediately, and the recordings will be saved in the specified location. When the record function is started, a flashing indication icon will be shown at the bottom right corner of the image display view.

## 4.4 Playback

To play a recording, click “” (Miscellaneous Control) → “” (Status List), and select the “Record” tab. A list of all the recordings will be shown by defaults, and you can also sort out the logs you want to speed up the search time. For details, please refer to your user manual.

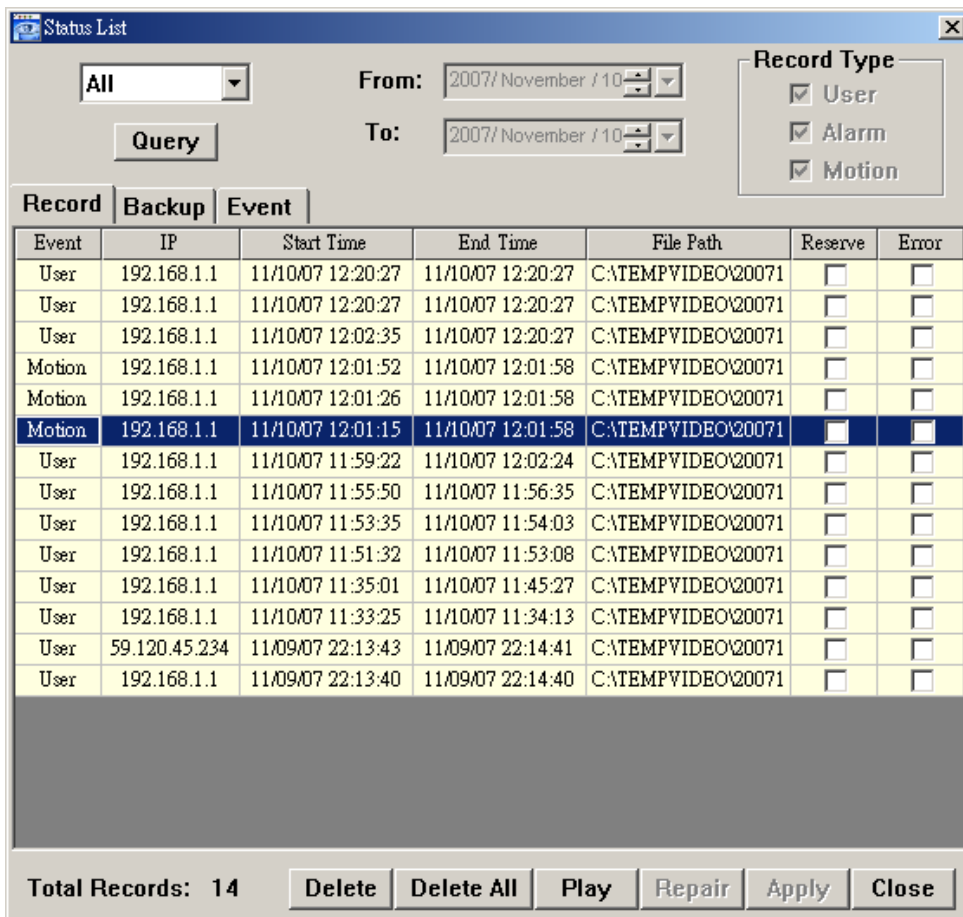

To immediately play a recording file, select a log from the list, and click “Play” button, or double-click the selected log. Then, the playback control panel will be shown at the bottom of the main control panel similar to the following.

For the playback control panel details, please refer to your user manual.

